


H15

Video Wall Splicer

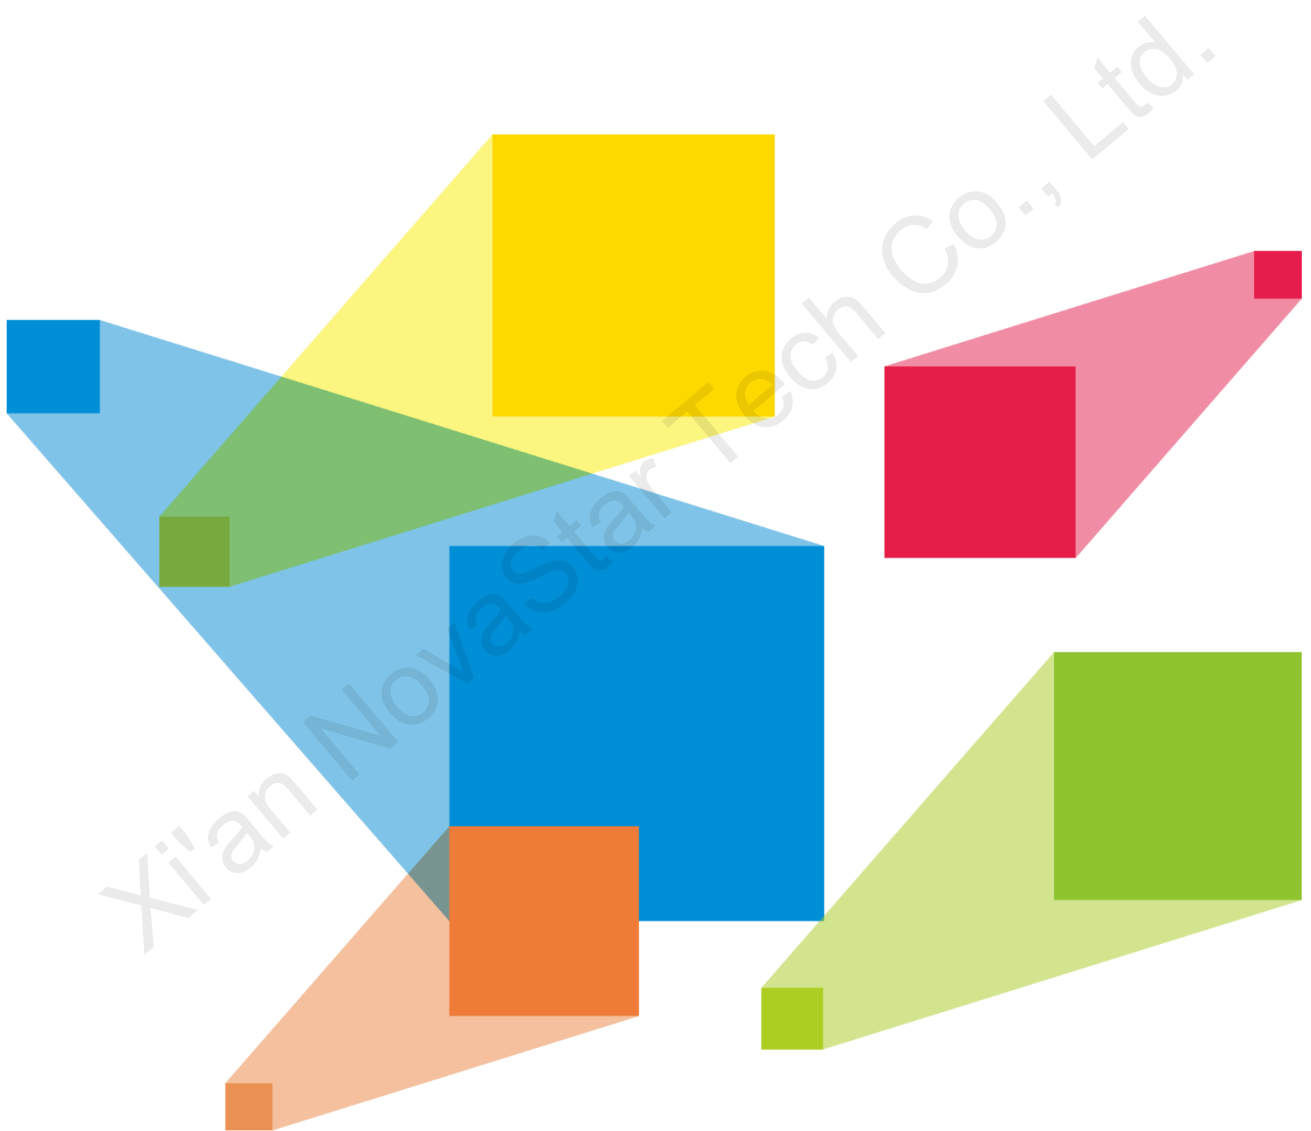

Specifications

Change History

| Document Version | Release Date | Description |
|------------------|--------------|---|
| V1.4.0 | 2022-04-30 | <ul style="list-style-type: none"> Added the section of Notes and Cautions. Updated the certifications. Added the descriptions for the H_1xDP1.2 input card and H_2xHDMI2.0+2xDP1.2 input card. |
| V1.3.3 | 2021-08-30 | <ul style="list-style-type: none"> Added the description of the low latency function. Added the notes for use of the USB connectors and COM port. Updated the certifications. |
| V1.3.2 | 2021-06-10 | Added the description of ordering or purchasing the optical module for the H_16xRJ45+2xfiber sending card. |
| V1.3.1 | 2021-05-21 | Update the power connector descriptions in Specifications. |
| V1.3.0 | 2021-04-30 | <ul style="list-style-type: none"> Added the descriptions for the following cards: <ul style="list-style-type: none"> H_2xHDMI2.0 input card H_1xHDMI2.0 input card Added H15 enhanced version and its relevant features in Specifications. |
| V1.2.0 | 2021-03-31 | <ul style="list-style-type: none"> Added the descriptions for the H_1x12G SDI input card. Added the descriptions for the following new features: <ul style="list-style-type: none"> XR scenario control Device backup and LED 4K sending card backup |
| V1.1.0 | 2020-01-29 | Added one HDMI cable to the product accessories. |
| V1.0.0 | 2020-11-30 | First release |

Introduction

The H15 is NovaStar's newest generation of video wall splicer, featuring excellent image quality and designed especially for fine-pitch LED screens. The H15 can work as splicing processors that integrate both video processing and video control capabilities, or work as pure splicing processors. The whole unit adopts a modular and plug-in design, and allows for flexible configuration and hot swapping of input and output cards. Thanks to excellent features and stable performance, the H15 can be widely used in a variety of applications, such as energy and power, judicial departments and prisons, military command, water conservancy and hydrology, meteorologic earthquake prediction, enterprise management, metallurgy of steel, banking and finance, national defense, public security traffic management, exhibitions and presentations, production scheduling, radio and television, educational and scientific research, as well as stage rental applications.

Based on the powerful hardware FPGA system architecture, with a modular and plug-in design, the H15 features a stable and highly efficient pure hardware architecture, and provides a variety of connector modules for flexible and personalized configuration, allowing for easy maintenance and low failure rate. The H15 provides industry-standard input connectors, including HDMI, DVI, DP, VGA, CVBS, SDI and IP, and supports 10-bit video source input and processing, as well as 4K high-definition inputs and outputs. The H15 also provides two kinds of LED 4K sending cards, allowing for the backup between the OPT ports and Ethernet ports as well as ultra-long distance transmission. Moreover, the H15 supports multi-screen and multi-layer management, input and output EDID management and monitoring, input source renaming, BKG and OSD settings and more, bringing you a rich image construction experience.

In addition, the H15 adopts the B/S architecture and supports cross-platform, cross-system access and control without the need to install an application program. On a Windows, Mac, iOS, Android or Linux platform, online collaboration of multiple users is supported and the Web page response speed is very fast, which greatly improves on-site setup efficiency. What's more, the H15 supports online firmware update, allowing for easy hardware update on a PC.

Certifications

CE, FCC, IC, CB, UL

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

Modular and plug-in design, free combination at your will

- Two kinds of LED 4K sending cards
 - H_20xRJ45 sending card loads up to 13,000,000 pixels.
 - H_16xRJ45+2xfiber sending card loads up to 10,400,000 pixels and provides two OPT ports that copy the outputs on Ethernet ports.
- Multi-capacity configuration on a single card slot
 - 4x 2Kx1K@60Hz
 - 2x 4Kx1K@60Hz
 - 2x 4Kx2K@60Hz
- 1x 4Kx2K@60Hz
- Simple screen configuration using a single card and connector
- Online status monitoring of all input and output cards
- Hot-swappable input and output cards
- H_2xRJ45 IP input card supports up to 100 IP camera inputs and input mosaic.
- Auto decryption of HDCP-encrypted sources
- Decimal frame rates supported
- HDR10 and HLG processing

Multi-screen management for centralized control

- Each screen can have its output resolution.
- Output mosaic

Adopts the frame synchronization technology, ensuring all the output connectors output the image synchronously. The image is complete and played smoothly, without any stuck, frame loss, tearing or piecing.
- Irregular screen configuration

Supports irregular rectangle mosaic without any limitations.
- Input source grouping management
- Eye saver mode

Display the image in a warmer but less bright way to relieve eye strain.
- LCD bezel compensation

Diverse display possibilities for flexible configuration

- Multi-layer display
 - H15: A single card supports 16x 2K layers, 8x DL layers or 4x 4K layers.
 - H15 Enhanced: A single card supports 10x 2K layers, 5x DL layers or 2x 4K layers.
 - All layers support cross-connector output and the layer quantity is not reduced for cross-connector output.
- High-definition scrolling text

Customize the scrolling text content, such as slogans or notification messages, and set the text style, scrolling direction and speed.
- Up to 2,000 presets

Fade effect and seamless switching supported, less than 60ms preset switching duration
- Scheduled playback of preset playlist

Set whether to add the presets to playlist, which is ideal for monitoring, exhibitions, presentations, and other applications.
- OSD settings on a single screen and adjustable OSD transparency
- BKG settings

BKG images do not occupy the layer resources.

The max. width and height of a BKG image is up to 15K and 8K respectively.
- Channel logo management

Set a text or image logo for identifying the input source.
- Input source cropping and renaming after cropping

Crop any input source image and form a new input source after cropping.
- HDR and 10-bit video processing, allowing for a more exquisite and clear image

- Color adjustment
Output connector color and screen color adjustable, including the brightness, contrast, saturation, hue and Gamma
- XR scenario control
- 3D function

Work with NovaStar's 3D emitter – EMT200 to enjoy the 3D visual effect.

- Low latency
Reduce the latency from the input source to the receiving card to as low as 1 frame.

Web-page control, easy, friendly and convenient

- Web control
Real-time response and 1000M/100M self-adaptive network control, allowing for multi-user collaboration

- Monitoring of inputs and outputs on Web page
- Firmware update on Web page
- Ark Visualized Management and Control Platform APP control on pad device

Status monitoring and redundant power supply for better stability and reliability

- Self-test for fault detection
- Auto monitoring and alarms
Supports hardware monitoring, such as fan rotation speed, module temperature and voltage, running status, and sends fault alarms if necessary.

- Supports an optional power supply for higher system reliability.
- Backup design
 - Backup between devices
 - Backup between LED 4K sending cards

Appearance

Front Panel




*The picture shown is for illustration purpose only. Actual product may vary due to product enhancement.

Notes:

- This product can only be placed horizontally. Do not mount vertically or upside-down.
- The product can be mounted in a standard 19-inch rack capable of withstanding at least four times the total weight of the mounted equipment. Twelve M5 screws should be used to fix the product.

| Name | Description |
|------------|---|
| LCD screen | Touchscreen displays the menus, submenus and messages, device status and monitoring information, and allows you to perform all the operations at your fingertips. |

Rear Panel

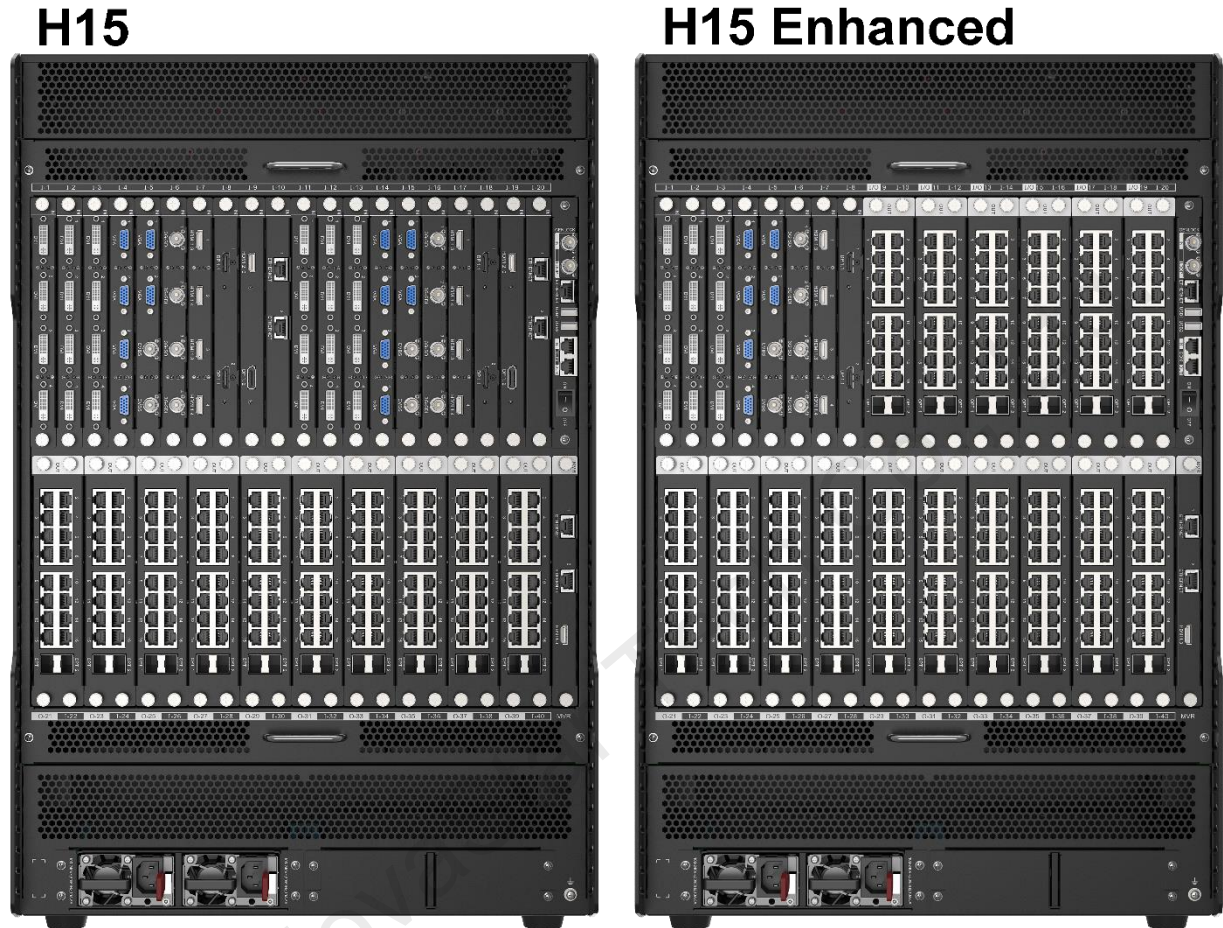


*The picture shown is for illustration purpose only. Actual product may vary due to product enhancement.

Notes:

- The silkscreen marking "I-x" indicates the slot is dedicated for the input card. "I" stands for input and "x" stands for the slot number. For example, "I-1" indicates this slot is the 1st input slot and for installing an input card only.
- The silkscreen marking "O-x" indicates the slot is dedicated for the output card. "O" stands for output and "x" stands for the slot number. For example, "O-10" indicates this slot is the 10th output slot and for installing an output card only.
- The silkscreen marking "I/O-x" indicates the slot accepts both input and output cards.
- The silkscreen marking "MVR" indicates the slot is dedicated for the preview card only.

Input Card



H_4xDVI input card









Support for single link and dual link input modes, and 10-bit input source
HDCP 1.4 compliant




Does not support interlaced signal input.




- Single link mode:

| | |
|---------------------------------|--|
| | <ul style="list-style-type: none"> - Four DVI connectors are all used for input. - Each connector supports the maximum resolution of 2048×1152@60Hz and the minimum resolution of 800×600@60Hz. - Custom resolutions: Max. width: 2560 pixels (2560×972@60Hz) Max. height: 2560 pixels (884×2560@60Hz) • Dual link mode: <ul style="list-style-type: none"> - Connectors 2 and 4 are used for input, and connectors 1 and 3 are unavailable. - Each connector supports the maximum resolution of 3840×1080@60Hz and the minimum resolution of 800×600@60Hz. - Custom resolutions: Max. width: 3840 pixels (3840×1124@60Hz) Max. height: 4095 pixels (1014×4095@60Hz) <p>Status LEDs:</p> <ul style="list-style-type: none"> • On: The input source is accessed normally. • Off: No input source is accessed or the input source is abnormal. |
| H_4xHDMI input card |  <p>Support for 10-bit input source Does not support interlaced signal input.</p> <p>For HDMI 1.3 inputs:</p> <ul style="list-style-type: none"> • Four connectors are all used for input. • Each connector supports the maximum resolution of 2048 × 1152@60Hz, and the minimum resolution of 800 × 600@60Hz. • Custom resolutions: Max. width: 2560 pixels (2560 × 972@60Hz) Max. height: 2560 pixels (884 × 2560@60Hz) • HDCP 1.4 compliant <p>For HDMI 1.4 inputs:</p> <ul style="list-style-type: none"> • Two HDMI 1.4 connectors are used for input, but two HDMI 1.3 connectors are unavailable. • Each connector supports the maximum resolution of 3840×1080@60Hz. • Custom resolutions: • Max. width: 3840 pixels (3840×1124@60Hz) • Max. height: 4095 pixels (1014×4095@60Hz) • HDCP 1.4 compliant <p>Status LEDs:</p> <ul style="list-style-type: none"> • On: The input source is accessed normally. • Off: No input source is accessed or the input source is abnormal. |
| H_1xHDMI2.0+1xD P1.2 input card |  <p>Only one connector can be used each time.</p> <p>Set to use which connector on the Web page. The default option is HDMI 2.0 connector.</p> <p>Does not support interlaced signal input.</p> |


| | |
|--|---|
| | <ul style="list-style-type: none"> ● 1x HDMI 2.0 <ul style="list-style-type: none"> – Backward compatible with HDMI 1.4 and HDMI 1.3 – Supports the maximum resolution of 3840 × 2160@60Hz. – HDCP 2.2 compliant – Custom resolutions: <ul style="list-style-type: none"> Max. width: 4092 pixels (4092 × 2261 @60Hz) Max. height: 4095 pixels (2188 × 4095@60Hz) ● 1x DP 1.2 <ul style="list-style-type: none"> – Backward compatible with DP 1.1 – Supports the maximum resolution of 4096×2160@60Hz or 8192×1080@60Hz. – HDCP 2.2 compliant – Custom resolutions: <ul style="list-style-type: none"> Max. width: 8192 pixels (8192×1146@60Hz) Max. height: 4095 pixels (2188 × 4095@60Hz) <p>Status LEDs:</p> <ul style="list-style-type: none"> ● On: The input source is accessed normally. ● Off: No input source is accessed or the input source is abnormal. |
| <p>H_2xHDMI2.0+2xD P1.2 input card</p> |  <p>This card can be installed into the slots from I-1 to I-8 only.</p> <p>Two group of connectors are provided. Each group contains one HDMI 2.0 and one DP 1.2.</p> <p>Only one connector from each group can be used each time. Set to use which connector on the Web page. The default option is HDMI 2.0.</p> <p>Does not support interlaced signal input.</p> <ul style="list-style-type: none"> ● 2x HDMI 2.0 <ul style="list-style-type: none"> – Backward compatible with HDMI 1.4 and HDMI 1.3 – Supports the maximum resolution of 3840 × 2160@60Hz. – HDCP 2.2 compliant – Custom resolutions: <ul style="list-style-type: none"> Max. width: 4092 pixels (4092 × 2261 @60Hz) Max. height: 4095 pixels (2188 × 4095@60Hz) ● 2x DP 1.2 <ul style="list-style-type: none"> – Backward compatible with DP 1.1 – Supports the maximum resolution of 4096 × 2160@60Hz or 8192 × 1080@60Hz. – HDCP 2.2 compliant – Custom resolutions: <ul style="list-style-type: none"> Max. width: 8192 pixels (8192 × 1146@60Hz) Max. height: 4095 pixels (2188 × 4095@60Hz) <p>Status LEDs:</p> <ul style="list-style-type: none"> ● On: The input source is accessed normally. ● Off: No input source is accessed or the input source is abnormal. |

| | |
|----------------------------------|--|
| <p>H_2xRJ45 IP input card</p> |  <p>2x RJ45 Gigabit Ethernet ports Support for interlaced signal input</p> <ul style="list-style-type: none"> • Supported protocols: RTSP, GB28181 and ONVIF • Supported coding formats: H.264 and H.265 • Single card decoding capability: <ul style="list-style-type: none"> - 4x 3840x2160@30fps - 16x 1920x1080@30fps • DHCP compliant |
| <p>H_4x3G SDI input card</p> |  <p>4x 3G-SDI</p> <ul style="list-style-type: none"> • Backward compatible with HD-SDI and SD-SDI • Supports ST-424 (3G), ST-292 (HD) and SMPTE 259 SD. • Each connector supports the maximum resolution of 1920x1080@60Hz. • Supports 1080i/576i/480i de-interlacing processing. • Does not support input resolution and bit depth settings. <p>Status LEDs:</p> <ul style="list-style-type: none"> • On: The input source is accessed normally. • Off: No input source is accessed or the input source is abnormal. |
| <p>H_2xCVBS+2xVGA input card</p> |  <p>2x VGA</p> <ul style="list-style-type: none"> • Each connector supports the maximum resolution of 1920x1200@60Hz. <p>2x CVBS</p> <ul style="list-style-type: none"> • Supports PAL and NTSC. <p>Status LEDs:</p> <ul style="list-style-type: none"> • On: The input source is accessed normally. • Off: No input source is accessed or the input source is abnormal. |
| <p>H_4xVGA input card</p> |  <p>4x VGA</p> <ul style="list-style-type: none"> • Each connector supports the maximum resolution of 1920x1200@60Hz. <p>Status LEDs:</p> <ul style="list-style-type: none"> • On: The input source is accessed normally. • Off: No input source is accessed or the input source is abnormal. |
| <p>H_2xDP1.1 input card</p> |  <p>2x DP1.1</p> <ul style="list-style-type: none"> • Each connector supports the maximum resolution of 3840x1080@60Hz or 3840x2160@30Hz. • Custom resolutions: <ul style="list-style-type: none"> - Max. width: 3840 pixels (3840x1124@60Hz) |


| | <ul style="list-style-type: none"> - Max. height: 4095 pixels (1014x4095@60Hz) • Supports 8-bit and 10-bit inputs. • HDCP 1.3 compliant • Does not support interlaced signal input. <p>Status LEDs:</p> <ul style="list-style-type: none"> • On: The input source is accessed normally. • Off: No input source is accessed or the input source is abnormal. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------|--|-------|-----|-----|------|-------|---|---|---|---|---|--------|-----------|--|-----|--|--|--|--|--|--|--------|------|-------|--|-----|------|-------|--|--|--|--------|-----|--|--|--|-----|--|--|--|--|
| <p>H_1xDP1.2 input card</p> |  <p>1x DP 1.2</p> <ul style="list-style-type: none"> • Backward compatible with DP 1.1 • Each connector supports the maximum resolution of 4096x2160@60Hz or 8192x1080@60Hz. • Custom resolutions: <ul style="list-style-type: none"> - Max. width: 8192 pixels (8192x1146@60Hz) - Max. height: 4095 pixels (2188x4095@60Hz) • HDCP 2.2 compliant <p>Status LEDs:</p> <ul style="list-style-type: none"> • On: The input source is accessed normally. • Off: No input source is accessed or the input source is abnormal. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>H_STD I/O card</p> |  <ul style="list-style-type: none"> • 2x COM <p>Programmable RS422/RS485/RS232 ports that are used to control the devices that adopt RS422/RS485/RS232 protocol</p> <ul style="list-style-type: none"> - COM port pins are shown as below:  <ul style="list-style-type: none"> - Pin wirings are shown as below: <table border="1" data-bbox="576 1435 1161 1697"> <thead> <tr> <th>PIN</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td colspan="2">—RXD—TXD—</td> <td colspan="3">GND</td> <td colspan="4"></td> </tr> <tr> <td>RS-422</td> <td>RXD-</td> <td colspan="2">—TXD+</td> <td>GND</td> <td>RXD+</td> <td colspan="2">—TXD-</td> <td colspan="2"></td> </tr> <tr> <td>RS-485</td> <td colspan="4">—A—</td> <td colspan="5">—B—</td> </tr> </tbody> </table> • 1x ETHERNET <ul style="list-style-type: none"> - Control the device connected to this card. - 10/100Mbps self-adaptive - TCP/IP protocol and UDP/IP protocol supported • 3x I/O <ul style="list-style-type: none"> - Trigger the execution of the function requirements via programming. - Input and output modes supported - Pins 1, 2 and 3 can be set to either the input or output, and pin G is the common grounding pin for pins 1, 2 and 3. | PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | RS-232 | —RXD—TXD— | | GND | | | | | | | RS-422 | RXD- | —TXD+ | | GND | RXD+ | —TXD- | | | | RS-485 | —A— | | | | —B— | | | | |
| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS-232 | —RXD—TXD— | | GND | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS-422 | RXD- | —TXD+ | | GND | RXD+ | —TXD- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS-485 | —A— | | | | —B— | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | |
|------------------------|---|
| | <ul style="list-style-type: none"> • 3x RELAY OUT <ul style="list-style-type: none"> – Connect to the relay to control the power on and off the connected device. – Voltage: 30 VDC, current: 3A at maximum – Six pins are divided into three groups, which can be connected or disconnected via programming. • 3x IR OUT <ul style="list-style-type: none"> – Programmable infrared control supported – Pins 1, 2 and 3 are used for infrared emission, and pin G is the common grounding pin for pins 1, 2 and 3. |
| H_1x12G SDI input card |  <ul style="list-style-type: none"> • 1x 12G-SDI IN <ul style="list-style-type: none"> – Backward compatible with 6G-SDI, 3G-SDI, HD-SDI and SD-SDI – Supports ST-2082-1 (12G), ST-2081-1 (6G), ST-424 (3G), ST-292 (HD) and SMPTE 259 SD. – Each connector supports the maximum resolution of 4096x2160@60Hz. – Supports 1080i/576i/480i de-interlacing processing. – Does not support input resolution and bit depth settings. • 1x 12G-SDI LOOP <ul style="list-style-type: none"> – Loop out the 12G-SDI signal. • Status LEDs: <ul style="list-style-type: none"> – On: The input or loop output is connected normally. – Off: No input or loop output is connected or the input or loop output is abnormal. |
| H_2xHDMI2.0 input card |  <p>This card can be installed into the slots from I-1 to I-8 only.</p> <p>2x HDMI 2.0</p> <ul style="list-style-type: none"> • Backward compatible with HDMI 1.4 and HDMI 1.3 • Each connector supports the maximum resolution of 3840 × 2160@60Hz. • Two 4K inputs can be connected at the same time. • HDCP 2.2 compliant • Custom resolutions: <ul style="list-style-type: none"> – Max. width: 4092 pixels (4092 × 2261 @60Hz) – Max. height: 4095 pixels (2188 × 4095@60Hz) • Status LEDs: <ul style="list-style-type: none"> – On: The input source is accessed normally. – Off: No input source is accessed or the input source is abnormal. |
| H_1xHDMI2.0 input card |  <p>1x HDMI 2.0</p> <ul style="list-style-type: none"> • Backward compatible with HDMI 1.4 and HDMI 1.3 • Each connector supports the maximum resolution of 3840 × 2160@60Hz. • HDCP 2.2 compliant • Custom resolutions: |


| | |
|---|---|
| | <ul style="list-style-type: none"> - Max. width: 4092 pixels (4092 × 2261 @60Hz) - Max. height: 4095 pixels (2188 × 4095 @60Hz) • Status LEDs: <ul style="list-style-type: none"> - On: The input source is accessed normally. - Off: No input source is accessed or the input source is abnormal. |
| Output Card | |
| <p>H_16xRJ45+2xfiber sending card</p> | <p>LED 4K sending card can load up to 10,400,000 pixels (max. width: 10,240 pixels, max. height: 10,240 pixels).</p> <p>This card occupies two slots.</p> <ul style="list-style-type: none"> • 16x RJ45 Gigabit Ethernet outputs <ul style="list-style-type: none"> - Bit depth: 8-bit A single Ethernet port loads up to 650,000 pixels. - Bit depth: 10-bit A single Ethernet port loads up to 320,000 pixels. - Backup between Ethernet ports • 2x OPT outputs <ul style="list-style-type: none"> - Support both SMF and MMF transmission. - OPT 1 copies and outputs the data on Ethernet ports 1–8. - OPT 2 copies and outputs the data on Ethernet ports 9–16. <p>Note: For the optical module connected to the OPT port, you need to order or purchase separately.</p> |
| <p>H_20xRJ45 sending card</p> | <p>LED 4K sending card can load up to 13,000,000 pixels (max. width: 10,752 pixels, max. height: 10,752 pixels).</p> <p>This card occupies two slots.</p> <ul style="list-style-type: none"> • 20x RJ45 Gigabit Ethernet outputs <ul style="list-style-type: none"> - Bit depth: 8-bit A single Ethernet port loads up to 650,000 pixels. - Bit depth: 10-bit A single Ethernet port loads up to 320,000 pixels. • Backup between Ethernet ports |
| <p>H_2xRJ45+1xHDMI 1.3 preview card</p> | <ul style="list-style-type: none"> • 2x RJ45 Gigabit Ethernet outputs Connect to the network for monitoring the inputs and outputs. • 1x HDMI 1.3 |

| | |
|--|---|
| | <p>Connect to a monitor for displaying the monitoring information.</p> <p>Note: The monitoring of the first output card on the H15 enhanced version is unavailable.</p> |
| H_Control Card | |
|  | |
| GENLOCK | <p>Supports bi-level and tri-level.</p> <ul style="list-style-type: none"> • IN: Accept the Genlock signal • LOOP: Loop the Genlock signal. |
| ETHERNET | <p>A Gigabit Ethernet port</p> <ul style="list-style-type: none"> • Connect to the control PC for communication. • Connect to the router, switch or PC. • For Web control and NovaLCT screen configuration |
| USB 1 & USB 2 | <p>2x USB 2.0</p> <ul style="list-style-type: none"> • Update the device program. • Import or export the device configuration parameters. <p>Note: The USB connectors cannot provide power for the connected devices.</p> |
| COM | <p>A serial port that adopts RS232 serial protocol Support for central control system</p> <ul style="list-style-type: none"> • IN: Accept the signal from the central control system. • OUT: Loop the signal. <p>Note: The COM port cannot be connected to the network (router or switch) or LED cabinet (receiving card).</p> |
| Power switch | <ul style="list-style-type: none"> • – / ON: Power on the device. • O / OFF: Power off the device. |

Applications

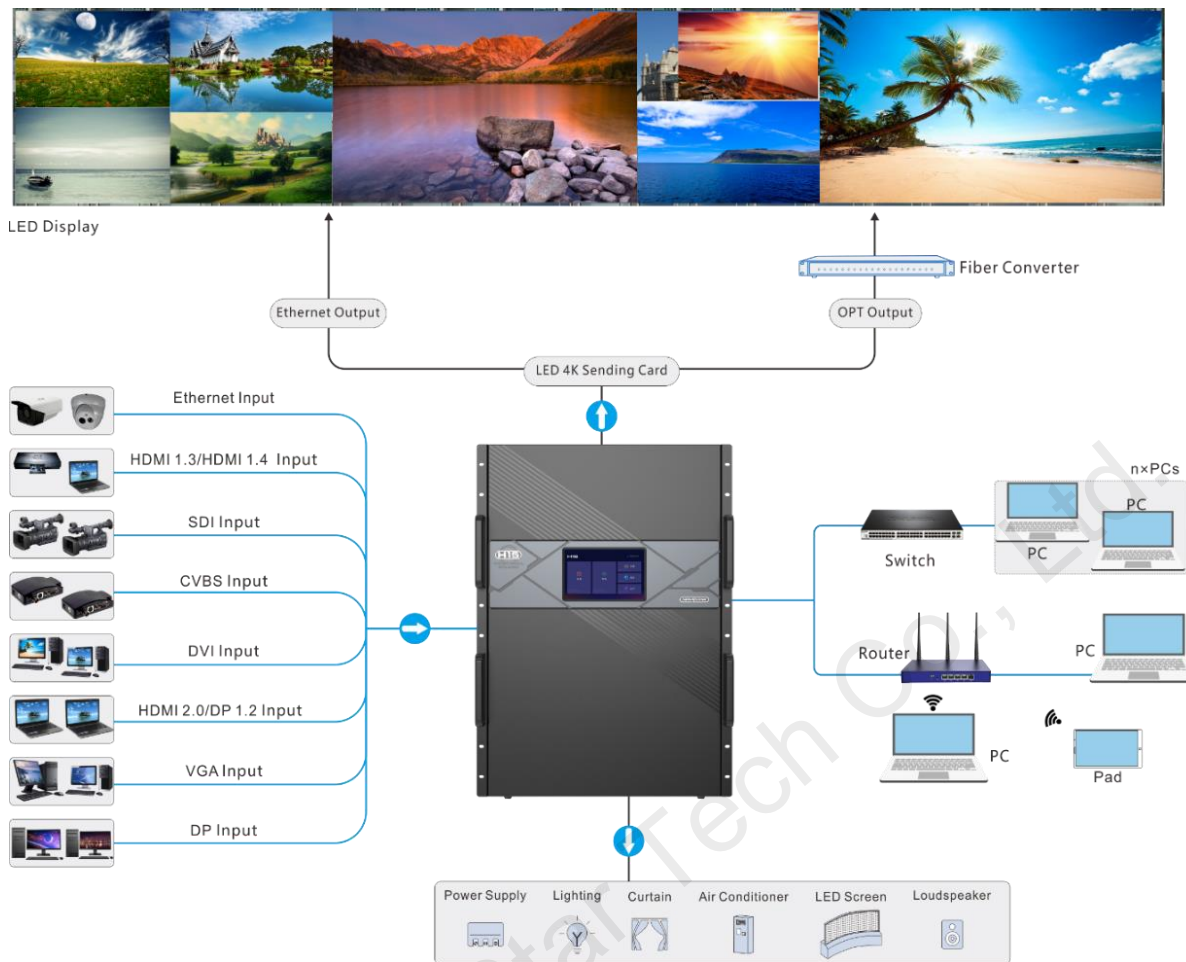

Dimensions

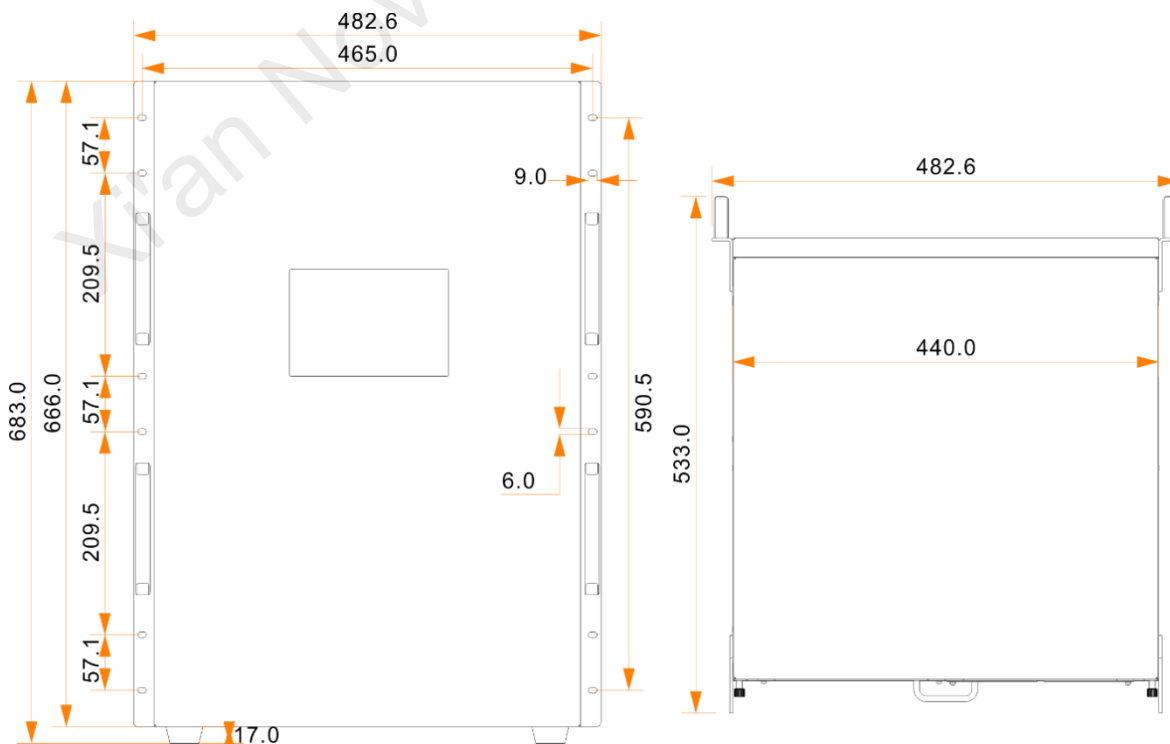

Tolerance: ± 0.5 Unit: mm

Specifications

| | | |
|--|--------------------------|--|
| Model | | H15 |
| Chassis | | H15 H15 Enhanced |
| Rack Unit | | 15U |
| Max. Input Cards | | 30 |
| Max. Input Channels | | 120 |
| Max. Output Cards | | 10 16 |
| Max. Layers | | 160 (Up to 16 layers per card) 160 (Up to 10 layers per card) |
| Max. Loading Capacity (LED 4K sending card) | | 130 million pixels 208 million pixels |
| Electrical Specifications | Power connector | 100–240V~, 50/60Hz, 10A–5A Notes: <ul style="list-style-type: none"> • The H15 comes with dual power supplies. Connect both power connectors when you use the device. • Two redundant power supplies are optional. |
| | Power consumption | 900 W |
| Operating Environment | Temperature | 0°C to 45°C |
| | Humidity | 0% RH to 80% RH, non-condensing |
| Storage Environment | Temperature | –10°C to +60°C |
| | Humidity | 0% RH to 95% RH, non-condensing |
| Physical Specifications | Dimensions | 482.6 mm x 683.0 mm x 533.0 mm |
| | Net weight | 61.8 kg |
| | Gross weight | 75.5 kg |
| Packing Information | Packing box | 775 mm x 675 mm x 845 mm |
| | Accessories | 2x Power cords 1x RJ45 Ethernet cable 1x Grounding cable 1x HDMI cable 1x Quick Start Guide 1x Certificate of Approval 1x Safety Manual 1x Custom Letter |

Video Source Features

| Input Connector | Color Depth | | Max. Input Resolution |
|--------------------|-------------|-------------|-----------------------|
| HDMI 2.0 | 8-bit | RGB 4:4:4 | 4096x2160@60Hz |
| | | YCbCr 4:4:4 | 8192x1080@60Hz |
| | | YCbCr 4:2:2 | |
| | | YCbCr 4:2:0 | 4096x2160@60Hz |
| | 10-bit | RGB 4:4:4 | 4096x2160@30Hz |
| | | YCbCr 4:4:4 | 4096x1080@60Hz |
| | | YCbCr 4:2:2 | 4096x2160@60Hz |
| | | YCbCr 4:2:0 | |
| | 12-bit | RGB 4:4:4 | 4096x2160@30Hz |
| | | YCbCr 4:4:4 | 4096x1080@60Hz |
| | | YCbCr 4:2:2 | 4096x2160@60Hz |
| | | YCbCr 4:2:0 | |
| DP 1.2 | 8-bit | RGB 4:4:4 | 4096x2160@60Hz |
| | | YCbCr 4:4:4 | 8192x1080@60Hz |
| | | YCbCr 4:2:2 | |
| | | YCbCr 4:2:0 | Not supported |
| | 10-bit | RGB 4:4:4 | 4096x2160@30Hz |
| | | YCbCr 4:4:4 | 4096x1080@60Hz |
| | | YCbCr 4:2:2 | 4096x2160@60Hz |
| | | YCbCr 4:2:0 | Not supported |
| | 12-bit | RGB 4:4:4 | 4096x2160@30Hz |
| | | YCbCr 4:4:4 | 4096x1080@60Hz |
| | | YCbCr 4:2:2 | 4096x2160@60Hz |
| | | YCbCr 4:2:0 | Not supported |
| HDMI 1.4 DP 1.1 | 8-bit | RGB 4:4:4 | 4096x1080@60Hz |
| | | YCbCr 4:4:4 | |
| | | YCbCr 4:2:2 | |
| | | YCbCr 4:2:0 | Not supported |
| | 10-bit | RGB 4:4:4 | 2048x1152@60Hz |
| | | YCbCr 4:4:4 | |
| | | YCbCr 4:2:2 | 4096x1080@60Hz |
| | | YCbCr 4:2:0 | Not supported |
| | 12-bit | RGB 4:4:4 | 2048x1152@60Hz |
| | | YCbCr 4:4:4 | |
| | | YCbCr 4:2:2 | 4096x1080@60Hz |
| | | YCbCr 4:2:0 | Not supported |
| HDMI 1.3 | 8-bit | RGB 4:4:4 | 2048x1152@60Hz |
| | | YCbCr 4:4:4 | |
| | | YCbCr 4:2:2 | |
| | | YCbCr 4:2:0 | Not supported |

| Input Connector | Color Depth | | Max. Input Resolution |
|-----------------|---|-------------|-----------------------|
| | 10-bit | RGB 4:4:4 | 2048x1152@60Hz |
| | | YCbCr 4:4:4 | |
| | | YCbCr 4:2:2 | |
| | | YCbCr 4:2:0 | Not supported |
| | 12-bit | RGB 4:4:4 | 2048x1152@60Hz |
| | | YCbCr 4:4:4 | |
| | | YCbCr 4:2:2 | |
| | | YCbCr 4:2:0 | Not supported |
| SL-DVI | 8-bit | RGB 4:4:4 | 2048x1152@60Hz |
| DL-DVI | 8-bit | RGB 4:4:4 | 3840x1080@60Hz |
| VGA CVBS | - | RGB 4:4:4 | 1920x1080@60Hz |
| 3G-SDI | <ul style="list-style-type: none"> • Supports up to 1920x1080@60Hz video inputs. • Input resolution and bit depth settings are not allowed. • Supports ST-424 (3G) and ST-292 (HD). | | |
| 12G-SDI | <ul style="list-style-type: none"> • Supports up to 4096x2160@60Hz video inputs. • Input resolution and bit depth settings are not allowed. • Supports ST-2082-1 (12G), ST-2081-1 (6G), ST-424 (3G) and ST-292 (HD). | | |

Notes and Cautions

Notes For Battery

- The battery is not intended to be replaced.
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas.

Notes for Installation

When the product needs to be installed on the rack, 12 screws at least M5*8 should be used to fix it. The rack for installation shall bear at least four times the total weight of the mounted equipment.

- Elevated Operating Ambient - If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer.
- Reduced Air Flow - Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.

- C. Mechanical Loading - Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.
- D. Circuit Overloading - Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.
- E. Reliable Earthing - Reliable earthing of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g. use of power strips).

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Others

- This is Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.
- Please read the specifications thoroughly and use the product in accordance with the requirements. If you have any questions about the specifications, please contact us immediately. If you use the product improperly, not following the requirements, or for illegal purposes, you shall be solely responsible for any consequences arising therefrom.

Copyright © 2022 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

NOVA STAR is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

Official website
www.novastar.tech

Technical support
support@novastar.tech