



Linsn Technology



X8408

Real 4K Two-in-one Video Processor

Specifications

V3.0

Revision History

Document Version	Hardware Version	Revision Date	Note
V3.0	V2	2020/7	New edition

Overview:

X8408 is a two-in-one (sender plus video processor) 4-layer-output controller designed and produced by Linsn, which supports up to 5.2 million pixels. It has 8 Gigabit outputs for up to 7680pixels in width or 4000pixels in height

Functions and Features:

- Supports 4*DVI inputs;
- Supports 8 gigabit outputs;
- Supports 4-layer output which can be set in any position with any size ;
- Supports fade in/out effects;
- Supports easy and quick software control;
- Supports up to 5.2 million pixels; up to 7680 pixels horizontally or up to 4000 pixels vertically;
- Supports dual USB2.0 communication for setup or cascade;
- Supports Linsn whole series receivers and multi-function boards.

Functions and Features:



Front Panel



No	Name	Description
1	Monitor	TFT_LCD for displaying info
2	Control Knob	For selecting and adjusting
3	Button	2 functional buttons, MENU and EXIT
4	Input selection	DVI1, DVI2, DVI3, DVI4, HDMI 2.0
5	Layer selection	L1-L4 corresponds to DVI1-DVI4
6	Power switch	ON/OFF

Official website: www.linsn.com

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

Input specifications

Port	QTY	Specifications
DVI	4	VESA standard, max supports 1920×1080@60Hz input

Rear Panel



Control port

1	LAN/WAN	Fast Ethernet Port
2	USB IN	USB input, for connecting PC or cascade
3	USB OUT	USB output for cascade
4	USB Config	For connecting PC to do setup

Input port


1	DVI	4*DVI input

Output port

1	RJ45X8	8*RJ45 gigabit output

Output specifications		
Model	Network Output QTY	Resolutions
X8408	8	Supports up to 5.2 million pixels Single port supports up to 650 thousand pixels, 384px is a minimum width and up to 2048px horizontally, those values are multiple of 32 Up to 7680 pixels supported horizontally Or up to 4000 pixels supported vertically

Dimensions:

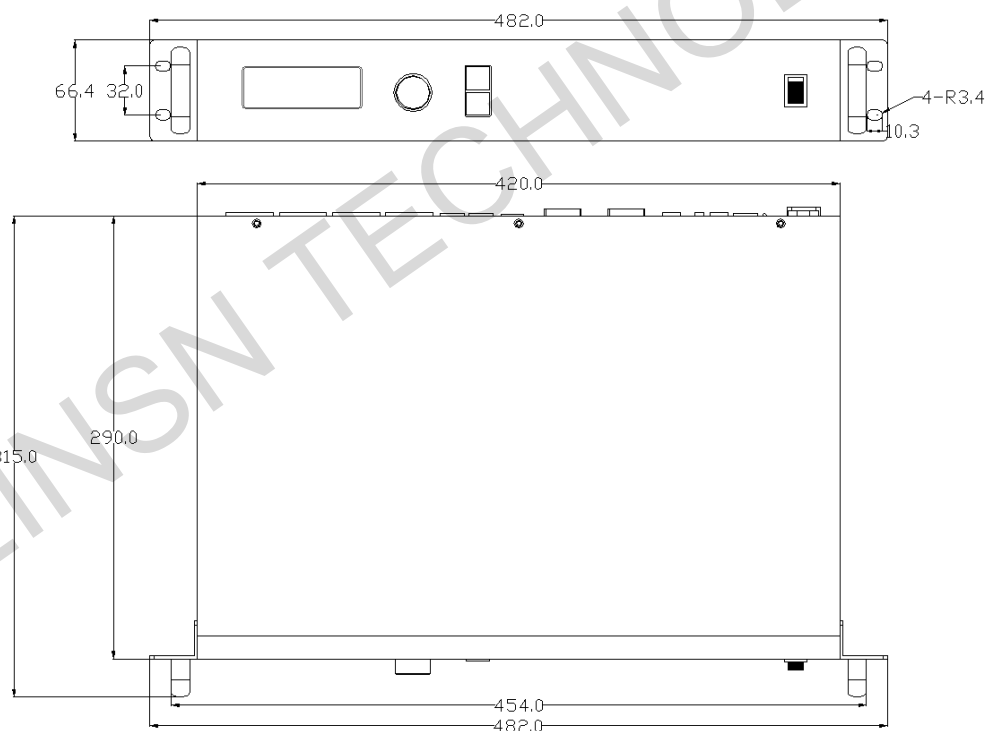

Official website: www.linsn.com

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

Specifications:

Power	Working Voltage	AC 100-240V, 50/60Hz
	Rated power consumption	35W
Working	Temperature	-20°C ~ 60°C
Environment	Humidity	0%RH ~ 95%RH
Physical	Dimensions	482*315*66.4 (unit: mm)
Dimensions	Weight	4.2Kg
Packing Dimensions	Packing	PE protective foam and carton
	Carton Dimensions	53*43*15(unit: cm)

END