


X1pro e




Key Features

- Dual Link DVI/HDMI1.4/DisplayPort1.1 input compatible
- Creat videowall up to 4K2K /8K1K
- Up to 4 pictures display on each output
- Independent PST to PGM Switching
- 3 optional input modules
- Scale and Seamless Switching of 2K and 4K inputs
- Multiple operation modes
- 4K EDID management
- XPOSE control compatible
- Support mulitple cascade control

Application

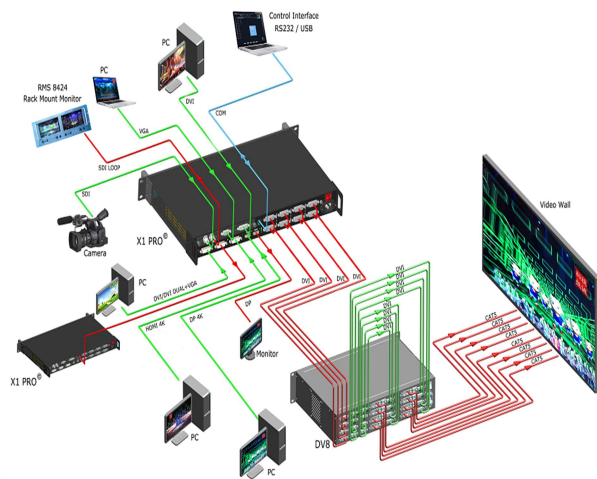

Dimensions

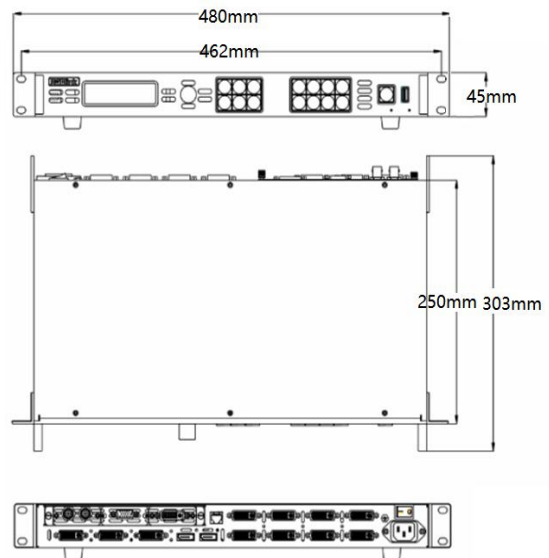

Order Codes

Product Code	Item
110-0001-21-0	X1pro e
190-0001-02-1	DVI Input Module 1xDVI
190-0001-06-1	HDMI Input Module 1xHDMI
190-0001-07-1	SDI Input/Loop Module
190-0001-09-1	CVBS Input /Backup Module

Product Code	Item
190-0001-03-1	DisplayPort Input Module 1XDisplayPort
190-0001-10-1	USB Input/Backup Module
190-0001-06-1	Input EXT Interface

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink[®]

www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	<i>Standard with</i> 2 × DVI 1 × DVI 2 × DisplayPort <i>3 optional inputs Select from</i> DVI Module HDMI Module 3G/HD/SD SDI Module Display Port 1.1 Module CVBS Module USB 2.0 Module	In/Loop HDMI/HDCP supported In/Loop 1 × DVI 1 × HDMI In/Loop 1 × SDI In/Loop 1 × DP In/Loop 1 × CVBS/Backup 1 × USB/Backup
	Output	<i>Standard with</i> 4 × DVI (backup) 4× DVI	
	Communication	1 × RJ11 1 × USB-A	Serial RS232 In Serial USB In
	Power	1 × IEC	
Performance	Input Resolutions	DVI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@30 VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 3840x2160@30 HDMI SMPTE 480i 576i 720p@50/59.94/60Hz 1080i@50/59.94/60Hz 1080p@50/59.94/60Hz VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 CVBS SMPTE 480i 576i SDI SMPTE 480i 576i 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 VGA VESA 800x600@60 1024x768@60 1280x1024@60 1366x768@60 1440x900@60 1600x1200@60 DisplayPort SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60	
	Output Resolutions	<i>Select from below or configure customized</i> DVI SMPTE 720p@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60/75/85 1280x720@50/60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x816@60	
	Supported Standard	SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI HDMI 1.4 (standard) 1.3 (optional) DVI Dual DVI VGA VGA-UXGA DisplayPort 1.1a	
Power	Input Voltage	AC 100V-240V, 50/60Hz	
	Max Power	65W	
Environment	Temperature	0°C ~ 55°C	
	Humidity	20%~90%	
Physical	Weight	Nett	2.7kg
		Packaged	6.3kg
	Dimension	Nett	480mmx303mmx45mm
		Packaged	535mmx355mmx130mm

