
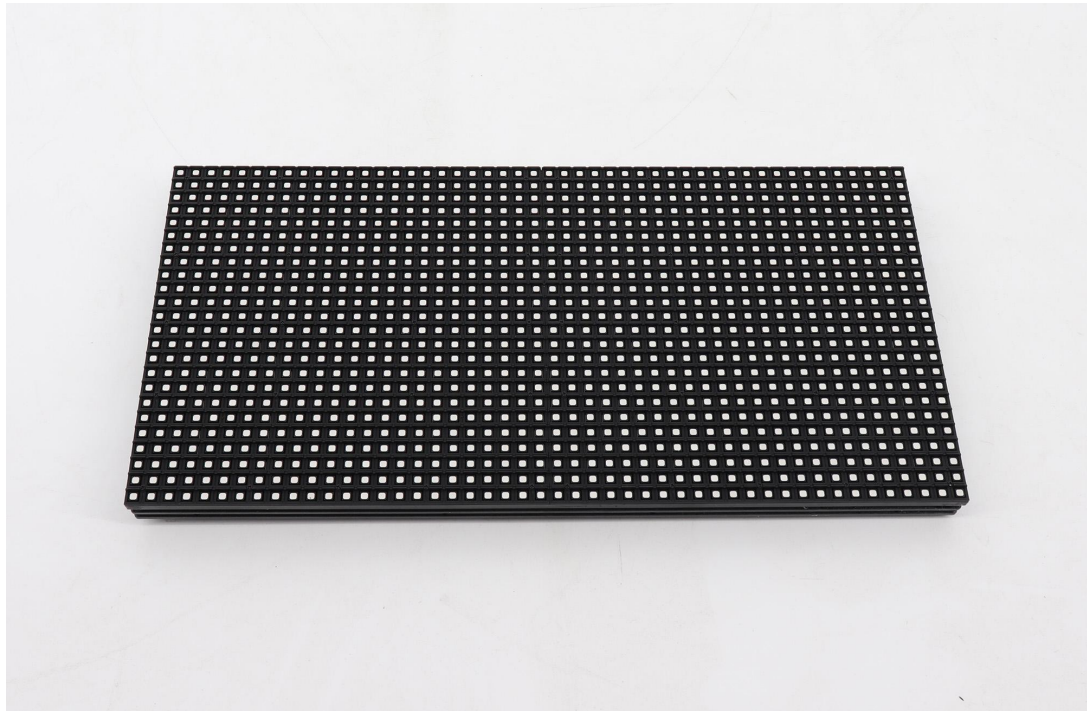



P6.67 Outdoor SMD3535 640x640mm Die-Cast Aluminum Rental LED Display

Model No.: **P6.67-OR6S-SMD3535-48x24-L640xH640**

Module Parameter	
Pixel Pitch	6.67mm
Pixel Configuration	SMD3535
Density	22,500 pixels/m ²
Module Resolution	48pixel(L) * 24pixel(H)
Module Dimension	320mm(L) * 160mm(H) * 25mm(D)
Driving Mode	Constant current, 1/6 duty
Module Mask	Pure black mask---high contrast screen
Module Photo	
	

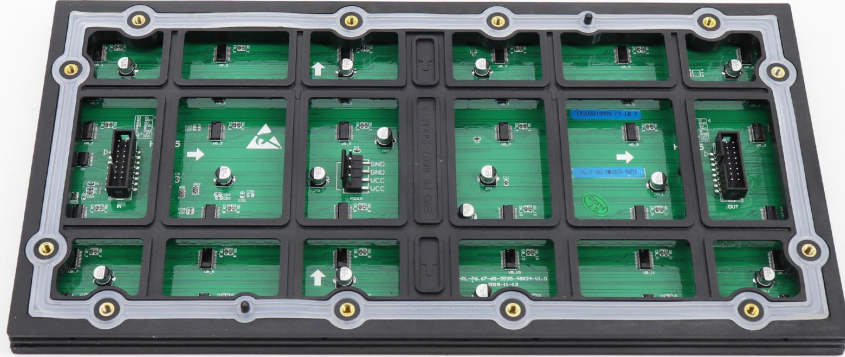

LED Cabinet

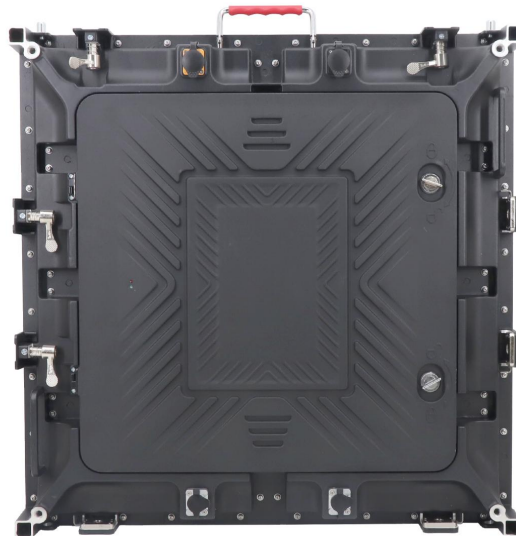

Module Quantity in a Cabinet	2(L) * 4(H)
Cabinet Dimension	640(L) * 640(H) * 90(D)mm
Cabinet Resolution	96(L) * 96(H)
Cabinet Material	Die-Cast Aluminum
Cabinet Weight	≈12KG

Tel: +86-755-23190947

Website: <https://www.eagerled.com>

E-mail: manager@eagerled.com

Address: Building C, Zhongyu High-Tech Industrial Park, Heshuikou, Matian, Guangming, Shenzhen, China

Electricity Parameter	
Optical Ratings	
Brightness	≥6,500 cd/m ²
Viewing Angle	140°(Horizontal); 140°(Vertical)
Best Viewing Distance	≥6m
Gray Grade	14 bits
Display Color	4.4 trillion Colors
Brightness Adjustment	100 grades by software or automatically by sensor
Operation Power	AC100-240V 50-60Hz Switchable
Max. Power Consumption	892 W/m ²
Avg. Power Consumption	298 W/m ²
Control System	
Frame Frequency	≥60Hz
Refresh Frequency	1920Hz / 3840Hz
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100M (Ethernet cable); 20KM (Optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable
Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
Reliability	
Working Temperature	-20~+60 °C
Storage Temperature	-30~+70 °C
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Operating Time	≥72 hours
Protection Grade	IP65(front), IP54(rear)
Out-of-Control Pixel Rate	≤0.01%
Cabinet Details	







Package

