


LedSync850M

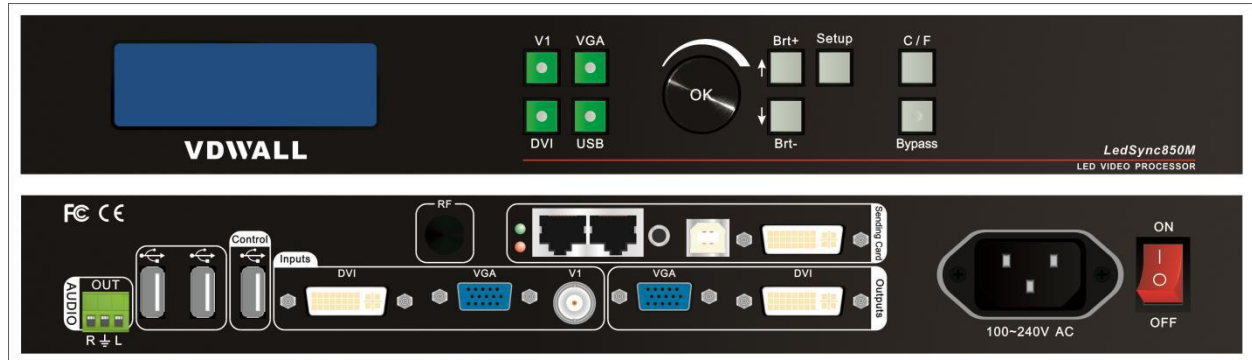

- ◆ **Latest mini LED display professional video processor**
- ◆ **Clear and fluent image; convenient operation; compact structure and easy carrying;**
- ◆ **Built-in HD multimedia player, USB2.0, support U disk video and image playing;**
- ◆ **Support wireless Wi-Fi online real-time video on demand.**
- ◆ **Maximal output resolution of single unit: 1920x1080 @60Hz ;**
- ◆ **Main features**
 1. 10+ Bit Faroudja® DCDI Cinema Processing.
 2. Latest generation Faroudja® Real Color®. Picture processing.
 3. Built-in HD multimedia player: support U disk video and image playing.
 4. Support wireless Wi-Fi online real-time video on demand.
 5. DVI input also supports HDMI 1.3a(with HDCP) full digital HD 1080P input.
 6. Seamless switching and fade in fade out switching between Video、VGA、DVI / USB inputs.
 7. Maximal output resolution of single unit :1920x1080_60Hz


8. One key to switch 4 input signals including 1×Video、 1×VGA 、 1×DVI、 1×USB2.0
9. Built in USB HD multimedia player outputs stereo audio.
10. Easy setup and adjustment through knob and keys on the panel. Full-design USB protocol for operating and setting.
11. 1 sending card built-in ability and the structure design is compatible with most of sending cards available on the market.
12. 12. 24 / 7 Application, High reliability and stability.

◆ Specifications

Inputs		
Type/Number	1×Video 1×VGA (RGBHV) 1×DVI (HDMI1.3) 1×USB2.0	
Video System	PAL/NTSC	
Composite Video Amplitude/Impedance	1V (p_p) / 75Ω	
VGA format	PC (VESA)	≤1920x1080_60Hz
VGA Amplitude/Impedance	R、 G、 B = 0.7 V (p_p) / 75Ω	
DVI format	PC (VESA standard)	≤1920x1080_60Hz
	HDMI1.3 (CEA-861)	
USB2.0	Video Format	mkv、 ts、 avi、 wmv、 rmvb、 mpeg、 mpg、 mp4、 vob、 mov、 asf
	Video Coded Format	H.265、 H.264(AVC HD)、 VC-1(WMV HD)、MPEG-2 HD、MPEG-1、MPEG-4、 Xvid
	Picture Format	JPG、 PNG、 BMP, the largest pixel 15 million
Input Connectors	Video: BNC VGA: 15pin D_Sub(female) DVI: 24+1 DVI_D USB: A type	

Outputs	
Type/Number	1×VGA (RGBHV) 1×DVI
VGA/DVI format	1024×768_60Hz/75Hz 1280×1024_60Hz/75Hz 1366×768_60Hz 1440×900_60Hz 1600×1200_60Hz 1920×1080p_50Hz/60Hz
VGA output Amplitude	R、G、B = 0.7 V (p_p) / 75Ω
Audio output	2.0Vp-p/10KΩ
Output connectors	VGA OUT: 15pin D_Sub(female) DVI OUT: 24+1 DVI_D
others	
Control	Panel/ PC software
Input Voltage	100-240VAC 50/60Hz
Power Consumption	≤20W
Environment Temperature	0-45℃
Environment Humidity	15-85%
Size (packing)	385 (L) x 280mm (W) x 120mm (H)
Weight	G.W.2.8Kg N.W. 1.7Kg

◆ Dimension:

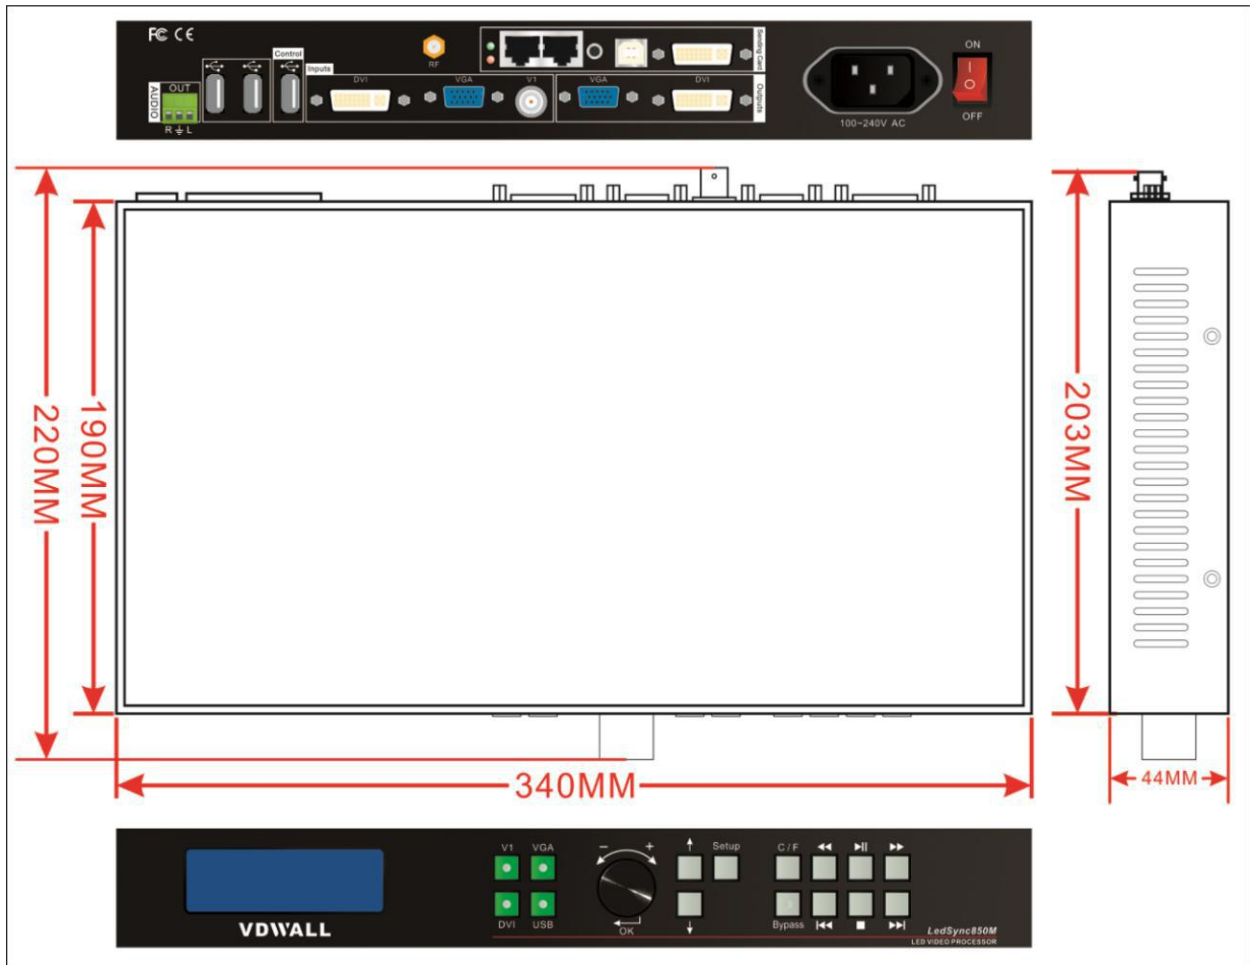

◆ Connection diagram:

