

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

EA-Flex

Indoor Soft Flexible LED Screen

Feature:

1. Ultra-light Flexible LED Display Module;
2. Flexible LED modules can deform and bend;
3. Magnetic front service design;
4. Can be installed or replaced quickly;
5. Customized shape, wide application.



Flexible LED Module

Flexible LED modules
are soft and light.

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

Flexible Bending

Minimum bending
diameter of inner arc
and outer arc $\geq 169^\circ$



Front Service Design


The flexible LED module supports front service, which is convenient and quick.

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

Cool LED Display

Flexible LED display looks
strange and eye-catching.

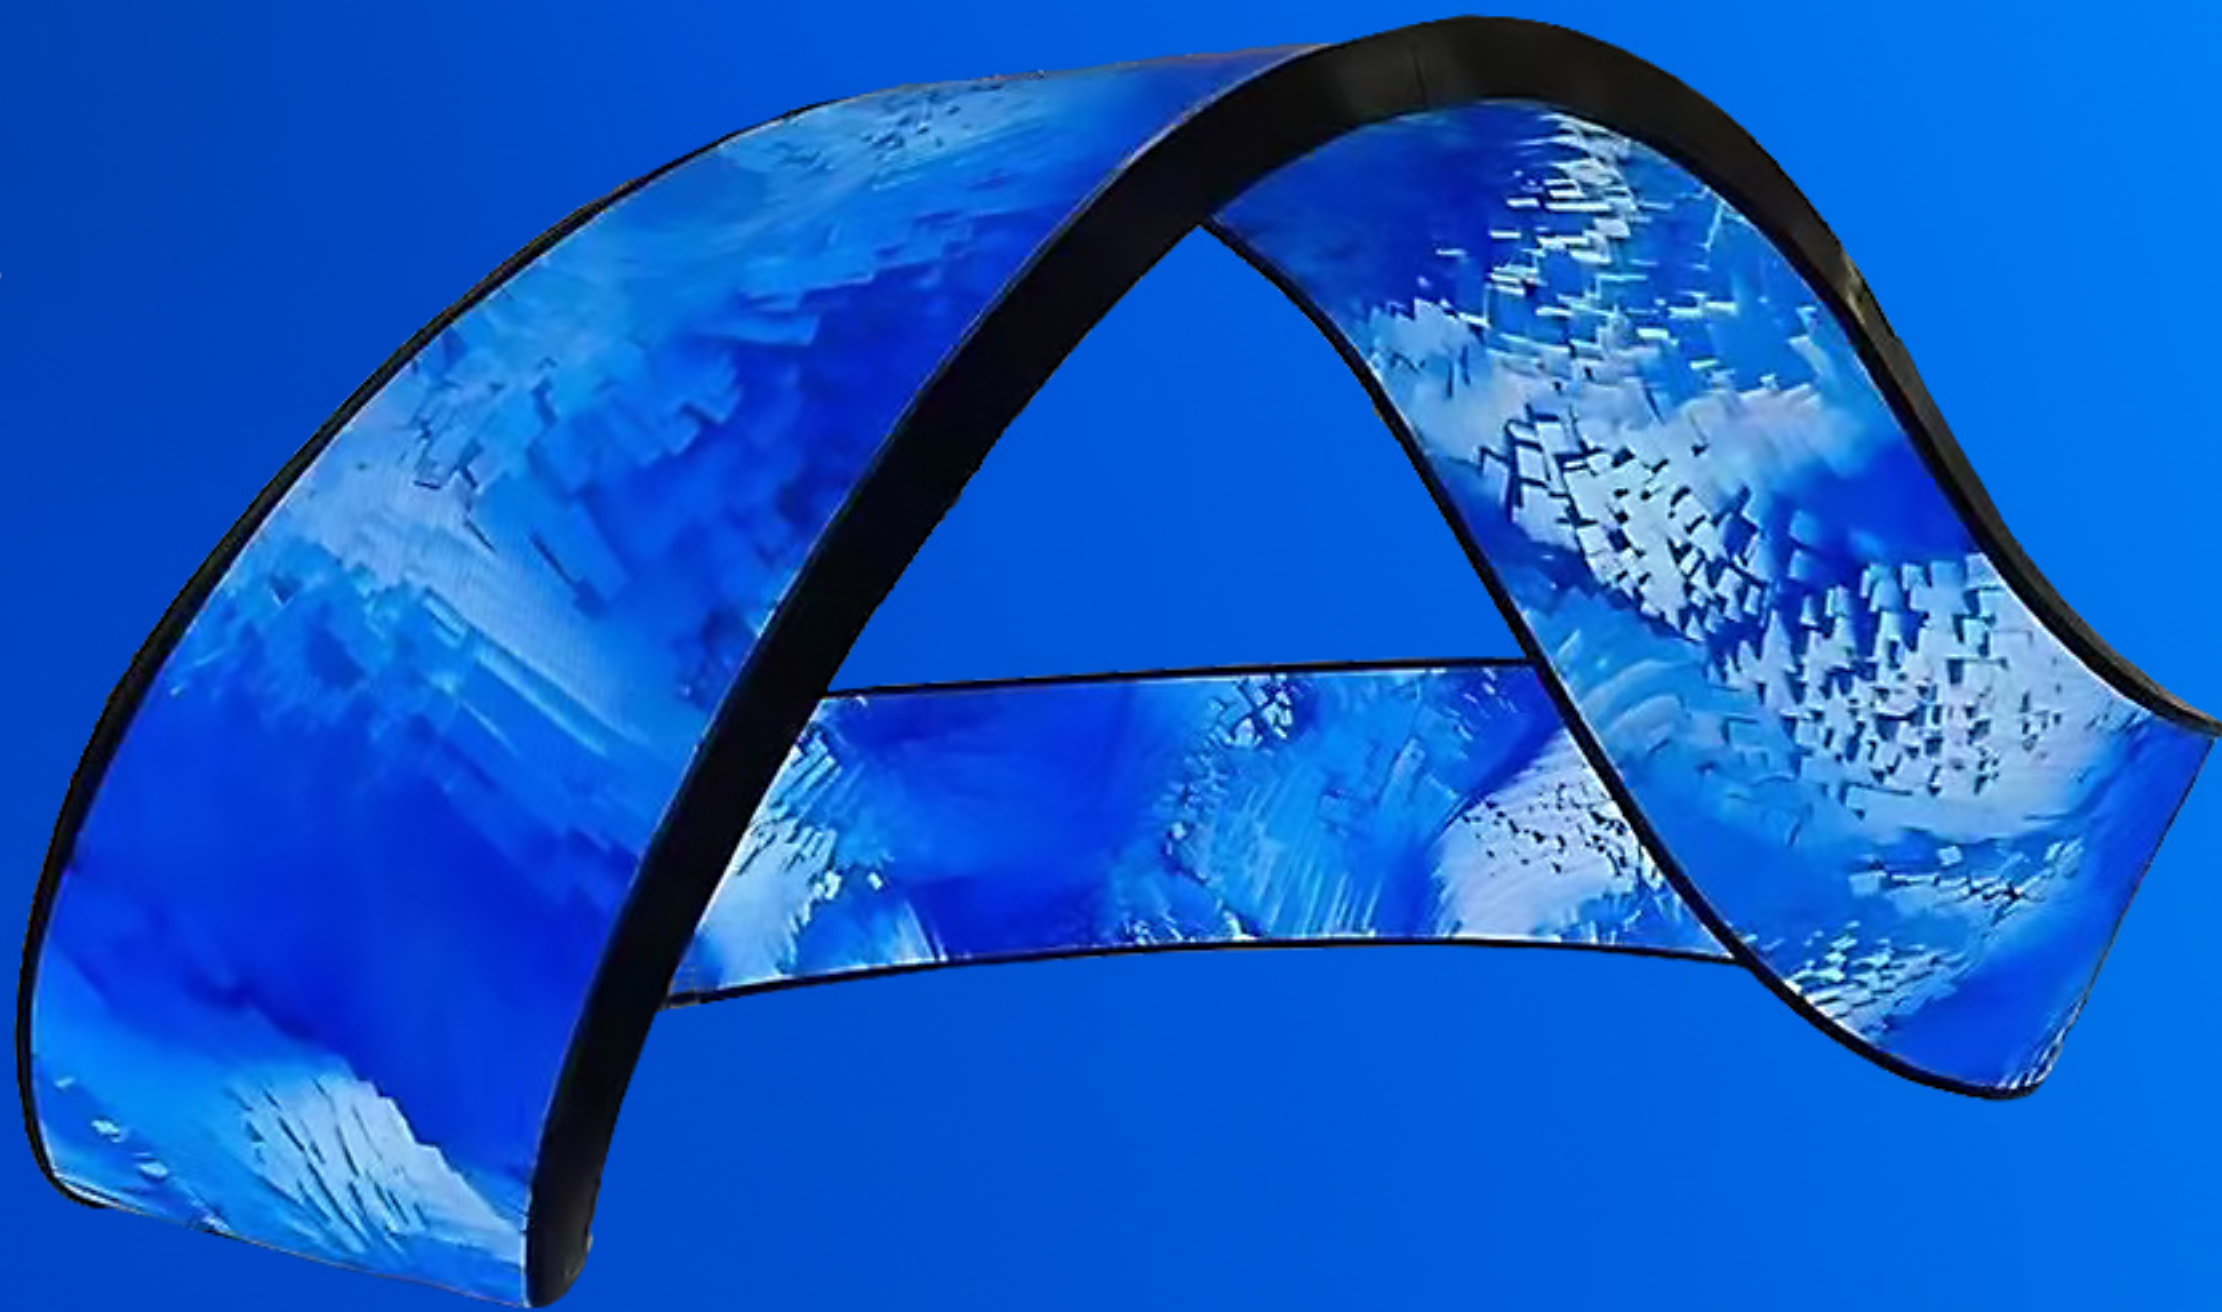

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

Excellent Display

Flexible LED screen has excellent display effect.

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN



EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

Installation Method

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN



Stacking install



Hanging install

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

Multiple Applications

EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN



EA-FLEX INDOOR SOFT FLEXIBLE LED SCREEN

EagerLED EA-Flex Indoor Soft Flexible LED Screen (250x250mm) Parameter

	Mode	EA-Flex-250-P1.56	EA-Flex-250-P1.95	EA-Flex-250-P2.6
Module Parameter	Pixel Pitch	1.56mm	1.95mm	2.6mm
	Pixel Configuration	SMD1212	SMD1515	SMD1515
	Driving Mode	1/40 duty	1/32 duty	1/32 duty
	Module Resolution(Pixel)	160(L) * 160(H)	128(L) * 128(H)	96(L) * 96(H)
	Module Size(mm)	250(L) * 250(H)	250(L) * 250(H)	250(L) * 250(H)
	Density	409,600 pixels/m ²	262,144 pixels/m ²	147,456 pixels/m ²
	Module Mask	Pure black mask---high contrast screen	Pure black mask---high contrast screen	Pure black mask---high contrast screen
	Max. Power Consumption	22W	22W	22W
Electricity Parameter	Brightness	600 cd/m ²	700 cd/m ²	700 cd/m ²
	Best Viewing Distance	≥1.56m	≥1.95m	≥2.6m
	Screen Refresh Frequency	≥3840Hz	≥3840Hz	≥3840Hz
	Viewing Angle	140°(Horizontal); 140°(Vertical)	140°(Horizontal); 140°(Vertical)	140°(Horizontal); 140°(Vertical)
	Frame Frequency	≥60Hz	≥60Hz	≥60Hz
	Gray Grade	14 bits	14 bits	14 bits
	Display Color	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors
	Brightness Adjustment	100 grades by software or automatically by sensor	100 grades by software or automatically by sensor	100 grades by software or automatically by sensor
	Operation Power	AC100-240V 50-60Hz Switchable	AC100-240V 50-60Hz Switchable	AC100-240V 50-60Hz Switchable
	Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
	Control Distance	100M (Ethernet cable);20KM (Optical fiber cable)	100M (Ethernet cable);20KM (Optical fiber cable)	100M (Ethernet cable);20KM (Optical fiber cable)
	Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200
	Color Temperature	5000—9300 adjustable	5000—9300 adjustable	5000—9300 adjustable
	Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet	Pixel by pixel, module by module, cabinet by cabinet	Pixel by pixel, module by module, cabinet by cabinet
	Working Temperature	-20 ~ +50 °C	-20 ~ +50 °C	-20 ~ +50 °C
	Storage Temperature	-30 ~ +70 °C	-30 ~ +70 °C	-30 ~ +70 °C
	Working Humidity	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH
	Out-of-Control Pixel Rate	≤0.01%	≤0.01%	≤0.01%

EagerLED Leading LED Display Manufacturer



Whatsapp

+86 153 6103 8665



Website

eagerled.com



YouTube

@EagerLED



Tiktok

@eagerleddisplay