P1.25 GOB Indoor SMD1010 320x160mm
LED Module Specification

Model No.: P1.25-O64S-SMD1010-256x128

Module Photo



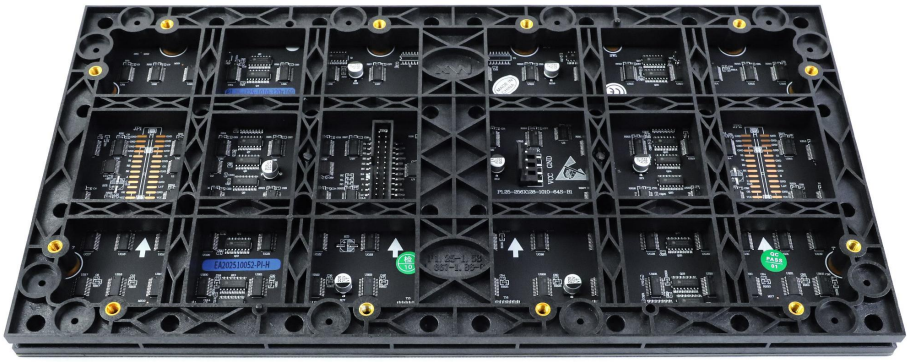

Module Parameter	
Pixel Pitch	1.25mm
Pixel Configuration	SMD1010
Density	640,000 pixels/㎡
Module Resolution	256pixel(L) * 128pixel(H)
Module Dimension	320mm(L) * 160mm(H) * 18mm(D)
Driving Mode	Constant current, 1/64 duty
Module Mask	Pure black mask---high contrast screen
Electricity Parameter	
Optical Ratings	
Brightness	600 cd/㎡
Viewing Angle	140°(Horizontal)； 140°(Vertical)
Best Viewing Distance	≥1.25m
Gray Grade	14 bits
Display Color	4.4 trillion colors
Brightness Adjustment	100 grades by software or automatically by sensor
Max. Power Consumption	21W
Control System	
Frame Frequency	≥60Hz
Refresh Frequency	≥3840Hz
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100m(Ethernet cable); 20KM(optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable
Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
Reliability	
Working Temperature	-20～+60 ℃
Storage Temperature	-30～+70 ℃
Working Humidity	10%～90% RH
Protection Grade	IP31
Out-of-Control Pixel Rate	≤0.01%

Package






FRAGILE ITEMS,
HANDLE WITH CARE.
小心轻放，勿压勿摔。
FULL COLOR
LED DISPLAY MODULE
全彩 LED 显示屏模组


FULL COLOR
LED DISPLAY MODULE
全彩 LED 显示屏模组
FULL COLOR
LED DISPLAY MODULE
MEAS: 575*370*395MM
MADE IN CHINA