



# SPECIFICATION

## 产品规格承认书

**Model(产品型号): DSP300L-0304**

Description(产品描述):宽压双路输出电源, 输出跳针三档可选

AC 输入 100~240Vac, DC 输出 4.2V/40A, 3.2V/30A

Revision(版本号): V1.2

Published Date(发行日期): 2024-06-26

| Approved by XingXiu |               |                |
|---------------------|---------------|----------------|
| Prepared by 编写      | Checked by 审核 | Approved by 批准 |
| 谢锦浩                 | 杨钟文           | 詹锐             |

Please send the original back to us after you have approved and signed.

客户承认签章后敬请寄回正本一份。

| Approved by customer |                  |                   |
|----------------------|------------------|-------------------|
| Comments 确认意见        | Approved by 批准签字 | Company's seal 盖章 |
|                      |                  |                   |
| Customer's Name:     |                  |                   |

The information in the specification is subject to change without notice. 内容如有更改，恕不另行通知。

## Content 目录

|                                                            |   |
|------------------------------------------------------------|---|
| 1. GENERAL DESCRIPTION (概述)                                | 1 |
| 2. ELECTRICAL SPECIFICATION (电气规格)                         | 1 |
| 2.1 INPUT ELECTRICAL CHARACTERISTICS (输入特性)                | 1 |
| 2.2 OUTPUT ELECTRICAL CHARACTERISTICS (输出特性)               | 1 |
| 2.2.1 OUTPUT VOLTAGE & CURRENT REGULATION (输出电压电流调整率)      | 2 |
| 2.2.2 INPUT VOLTAGE DERATING GUIDLINE (输入电压降额曲线)           | 2 |
| 2.2.3 TEMPERATURE RATING GUIDLINE (温度降额曲线)                 | 2 |
| 2.2.4 DC OUTPUT RIPPLE & NOISE. (输出纹波和噪声)                  | 3 |
| 2.2.5 OUTPUT TRANSIENT RESPONSE. (输出动态响应)                  | 3 |
| 2.2.6 DC OUTPUT VOLTAGE RISE TIME (输出上升时间)                 | 3 |
| 2.2.7 DC OUTPUT OVERSHOOT DURING TURN-ON & TURN-OFF (输出超调) | 3 |
| 2.2.8 HOLD-UP TIME (输出保持时间)                                | 3 |
| 2.2.9 POWER ON DELAY TIME (开机输出延迟时间)                       | 4 |
| 2.3 PROTECTION (保护功能)                                      | 4 |
| 2.3.1 DC OUTPUT OVER CURRENT PROTECTION (输出过流保护)           | 4 |
| 2.3.2 DC OUTPUT SHORT CIRCUIT PROTECTION (输出短路保护)          | 4 |
| 2.3.3 OVER VOLTAGE PROTECTION (输出过压保护)                     | 4 |
| 2.3.4 OTP(过温保护)                                            | 4 |
| 3. ISOLATION (绝缘性能)                                        | 4 |
| 3.1 INSULATION RESISTANCE (绝缘阻抗)                           | 4 |
| 3.2 DIELECTRIC STRENGTH (绝缘耐压)                             | 5 |
| 4. EMC (电磁兼容性)                                             | 5 |
| 4.1 EMI (电磁干扰)                                             | 5 |
| 4.2 EMS (电磁抗扰)                                             | 5 |
| 5. SAFETY (安全规格)                                           | 5 |
| 6. ENVIRONMENTAL REQUIREMENT (工作环境)                        | 6 |
| 6.1 TEMPERATURE (环境温度)                                     | 6 |
| 6.2 HUMIDITY (环境湿度)                                        | 6 |
| 6.3 ALTITUDE (海拔高度)                                        | 6 |
| 6.4 COOLING METHOD (冷却方式)                                  | 6 |
| 6.5 VIBRATION (振动耐受)                                       | 6 |
| 6.6 SHOCK (冲击耐受)                                           | 6 |
| 7. DIMENSION (物理尺寸)                                        | 6 |
| 8. WEIGHT (重量)                                             | 6 |
| 9. MTBF (平均故障间隔时间)                                         | 6 |
| 10. PIN CONNECTION (连接器脚位定义)                               | 7 |
| 11. POWER SUPPLY MOUNTING DIMENSION (安装尺寸)                 | 7 |
| 12. REQUIREMENTS FOR BURNING IN TEST (老化测试要求)              | 8 |
| 13. LABEL(标签)                                              | 8 |

## 1. General Description (概述)

**DSP300L-0304** is a conversion device which converts 100VAC-240VAC power to 4.2V and 3.2VDC Dual channel power. It takes advanced LLC technology, with precise control, input and output isolation, makes the device safe and efficient, and of good reliability. The conversion device mainly applies to the field of electronics, LED display, security monitoring, military-industry, communications, electricity, lighting display, industrial equipment etc.

**DSP300L-0304** 电源是一种将 100VAC-240VAC 市电转换为 4.2V 和 3.2V 双路直流电的变换装置；采用先进的 LLC 控制技术，控制精确，输入输出隔离，安全高效，可靠性好，具备完善的保护功能；主要应用于电子、LED 显示屏、安防监控、军工、通信、电力、灯具显示、工业设备等领域。

## 2. Electrical Specification (电气规格)

### 2.1 Input Electrical Characteristics (输入特性)


|                                     |                                   |
|-------------------------------------|-----------------------------------|
| Input voltage range (输入电压)          | 90Vac to 264Vac                   |
| Normal voltage range (标称输入)         | 100Vac to 240Vac                  |
| Frequency range (频率范围)              | 47Hz—63Hz                         |
| Max input ac current (最大输入电流)       | 4.7Amax@100Vac                    |
| Inrush current (cold state)<br>浪涌电流 | <60A@230V                         |
| Efficiency (full load) (效率)         | ≥85%@230Vac, FULL LOAD            |
| Leakage Current (泄漏电流)              | Less Than 1 mA,<br>@ 230Vac input |
| Normal output power (额定功率)          | 264W                              |
| Input Fuse (输入保险)                   | T6. 3AL/250Vac                    |
| Power Factor (功率因素)                 | PF>0.95/230Vac                    |
| Safety Certification (安规认证)         | 获得 CE, UL, FCC, CB, CCC 认证        |

### 2.2 Output Electrical Characteristics (输出特性)


#### 2.2.1 Output Voltage & Current Regulation (输出电压电流调整率)

| Output Voltage<br>输出电压 | Voltage select range<br>电压选择范围 | Voltage regulation accuracy<br>稳压精度 | Voltage Regulation<br>电压调整率 | Load Regulation<br>负载调整率 | Min. current<br>最小电流 | Rated current<br>额定电流 | Peak current<br>峰值电流 |
|------------------------|--------------------------------|-------------------------------------|-----------------------------|--------------------------|----------------------|-----------------------|----------------------|
| V1:4.2V                | 3.8/4.0/4.2V<br>跳针选择           | ±3%                                 | ±2%                         | ±2%                      | 0A                   | 40A                   | 44A                  |
| V2:3.2V                | 2.8/3.0/3.2V<br>跳针选择           | ±3%                                 | ±2%                         | ±2%                      | 0A                   | 30A                   | 33A                  |

### 2.2.2 Input voltage Derating Guideline (输入电压降额曲线)

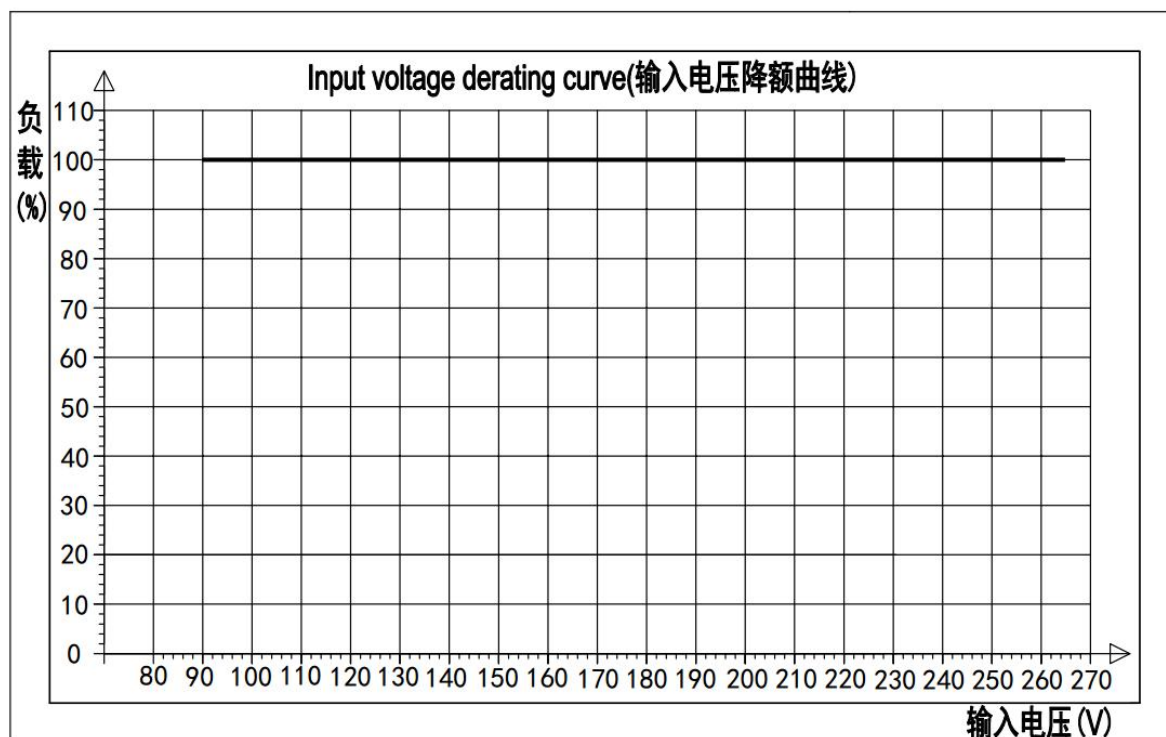

### 2.2.3 Temperature rating Guideline (温度降额曲线)

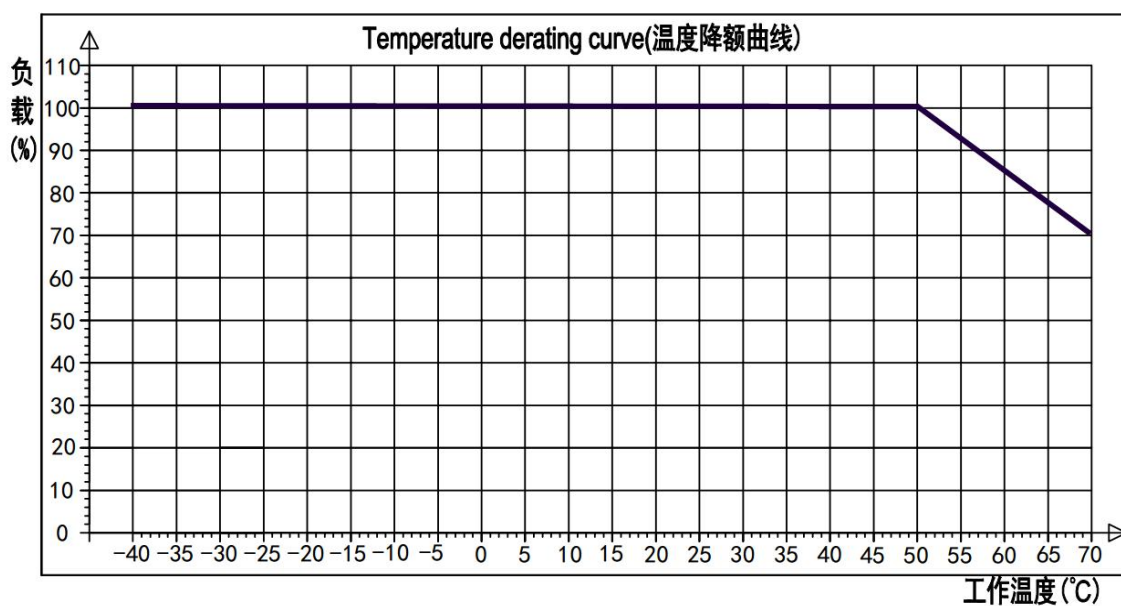

## 2.2.4 DC Output Ripple &amp; Noise. (输出纹波和噪声)

| Output Voltage | Ripple & Noise | Note                         |
|----------------|----------------|------------------------------|
| +4.2V          | 300mVp-p       | Vin=230Vac,Iout=40A,Ta=25° C |
| +3.2V          | 200mVp-p       | Vin=230Vac,Iout=30A,Ta=25°C  |

**Note:** 1) Ripple & Noise test: Ripple & Noise bandwidth is set to 20MHz.

纹波和噪声测试: 纹波和噪音带宽设置在 20 兆赫兹。

2) Use a 0.1uF ceramic capacitor in parallel with a 10uF electrolytic capacitor at output connector terminals for ripple & noise measurements.

输出端并联一个 0.1uF 的陶瓷电容和一个 10uF 的电解电容来测试纹波和噪声。

## 2.2.5 Output Transient Response. (输出动态响应)

Test condition (测试条件)

| Output Voltage | Voltage Tolerance Limit | Slew Rate | Load Change                         |
|----------------|-------------------------|-----------|-------------------------------------|
| +4.2V          | ±5%                     | 0.2A/uS   | 25% to 50% load and 50% to 75% load |
| +3.2V          | ±5%                     | 0.2A/uS   | 25% to 50% load and 50% to 75% load |

**Note:** Load change repetition rate: 50Hz to 100Hz .

备注: 跳变负载频率 50~100Hz.

## 2.2.6 DC output voltage rise time (输出上升时间)

| Output Voltage | 110Vac input & Full Load | 220Vac input & Full Load |
|----------------|--------------------------|--------------------------|
| +4.2V          | ≤100 mS                  | ≤100mS                   |
| +3.2V          | ≤100 mS                  | ≤100mS                   |

**Note:** The rise time measured is when the output voltages rise from 10% to 90% of specified output voltage Vout observed on the channel waveform.

备注: 上升时间为输出电压从 10% 上升到 90% 的时间。

## 2.2.7 DC Output Overshoot During Turn-On &amp; Turn-Off (输出超调)

| Output Voltage | Overshoot voltage(V) 超调电压 |             |
|----------------|---------------------------|-------------|
|                | Turn-on 开机                | Turn-off 关机 |
| +4.2V          | ≤10%                      | ≤10%        |
| +3.2V          | ≤10%                      | ≤10%        |

**Note:** All of dc output current from Min. to Max.

备注: 测试时负载范围: 最小到最大。

## 2.2.8 Hold-Up Time (输出保持时间)

| Output Voltage | 110Vac input | 220Vac input |
|----------------|--------------|--------------|
| +4.2V          | ≥10 mS       | ≥10 mS       |
| +3.2V          | ≥10 mS       | ≥10 mS       |

### 2.2.9 Power on delay time (开机输出延迟时间)

| Output Voltage | 90Vac input @ 25℃ | 90Vac input @ -40 ℃ |
|----------------|-------------------|---------------------|
| +4.2V          | ≤3S               | ≤5S                 |
| +3.2V          | ≤5S               | ≤7S                 |

**Note:** The Power delay time measured is when AC power on to 90%.

**备注:** 开机延迟时间为 AC 上电到输出电压 90%的时间。

## 2.3 Protection (保护功能)

### 2.3.1 DC Output Over Current Circuit Protection (输出过流保护)

| Output Voltage | Comments               | Note                |
|----------------|------------------------|---------------------|
| +4.2V          | 44A MIN(3.2V 满载) /自动复位 | 4.2V 输出过流时, 两路输出都关闭 |
| +3.2V          | 33A MIN(4.2V 满载) /自动复位 |                     |

### 2.3.2 DC Output Short Circuit Protection (输出短路保护)

| Output Voltage | Comments           | Note                |
|----------------|--------------------|---------------------|
| +4.2V          | Self-recovery/可自恢复 | 4.2V 输出短路时, 两路输出都关闭 |
| +3.2V          | Self-recovery/可自恢复 |                     |

### 2.3.3 Over voltage Protection (输出过压保护)

| Output Voltage | Comments    | Note                       |
|----------------|-------------|----------------------------|
| +4.2V          | 6V Max (保持) | 备注: 短路 PC300 光耦的 1,2 脚进行测试 |

### 2.3.4 OTP(过温保护)

| OTP                        | Comments           |
|----------------------------|--------------------|
| YES (外壳顶部中心温度 110 度-125 度) | Self-recovery/可自恢复 |

## 3. Isolation (绝缘性能)

### 3.1 Insulation Resistance (绝缘阻抗)

|                 |                                        |
|-----------------|----------------------------------------|
| Input To Output | DC500V 10 MΩ min.(at room temperature) |
| Input To FG     | DC500V 10 MΩ min.(at room temperature) |
| Output To FG    | DC500V 10 MΩ min.(at room temperature) |

### 3.2 Dielectric Strength (绝缘耐压)

|                        |                                         |
|------------------------|-----------------------------------------|
| <b>Input To Output</b> | 3000Vac 50Hz 1minute $\leq 10\text{mA}$ |
| <b>Input To FG</b>     | 1500Vac 50Hz 1minute $\leq 10\text{mA}$ |
| <b>Output To FG</b>    | 500Vdc 1minute $\leq 10\text{mA}$       |

**Notes:** Input line (L&N) should be shorted, and all output should be shorted.

**备注:** 电路如有防雷器件, 进行耐压测试时需断开电气管后进行。

## 4. EMC (电磁兼容性)

### 4.1 EMI (电磁干扰)

The power supply design shall comply with the following criterion:

电源电磁干扰设计满足下列标准:

● **Conduction Emission** (传导干扰度):

\*EN55022, CLASS B

\*FCC PART15 CLASS B

● **Radiated Emission** (辐射干扰度):

\*EN55022, CLASS B

\*FCC PART15 CLASS B

**Note:** We can work together with customer to modify the power and the system to meet above criterion.

**备注:** 如果客户需要, 可以配合在客户整机上进行更改, 达到标准。

### 4.2 EMS (电磁抗扰)

The power supply design shall comply with the following criterion:

电源电磁抗扰设计满足下列标准:

① **ESD** (静电抗扰度)

\*GB17626.2-2018/IEC61000-4-2 Lever 3 判据: A

② **EFT** (脉冲群抗扰度)

\*GB17626.4-2018/IEC61000-4-4 Lever 3 判据: A

③ **SURGE** (浪涌)

\*GB17626.5-2008/IEC61000-4-5 Lever 3 判据: A

④ **DIP** (电压跌落)

\*GB17626.11-2008/IEC61000-4-11 判据: C

电源 DIP 电压跌落要求表

| 跌落至   | 跌落时间   | 性能判据 |
|-------|--------|------|
| 0%Ut  | 10ms   | B    |
| 70%Ut | 500ms  | C    |
| 40%Ut | 200ms  | C    |
| 0%Ut  | 5000ms | C    |



## 5. Safety (安全规格)

The power supply design shall comply with the following criterion:

电源安全性设计满足下列标准:

\*UL62368/IEC62368/EN62368

\*GB4943.1-2022

## 6. Environmental Requirement (工作环境)

### 6.1 Temperature (环境温度)

\* Operating 工作温度:  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  (高温需降额使用)

\* Storage 存储温度:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

### 6.2 Humidity (环境湿度)

\* Operating 工作: From 10% to 90% relative humidity (non-condensing).

\* Storage 存储: From 5 to 95% relative humidity (non-condensing).

### 6.3 Altitude (海拔高度)

\* Operating: -60 to 5000 m

\* Storage: up to 5000 m

### 6.4 Cooling Method (冷却方式)

\* Ventilation cooling. 自然冷却

### 6.5 Vibration (振动耐受)

\* 10-500Hz,  $19.6\text{m/s}^2$ (2G), 10minutes each along X, Y and Z axis.

### 6.6 Shock (冲击耐受)

\*  $49\text{m/s}^2$ (5G), 11ms, once each X, Y and Z axis.

## 7. Dimension (物理尺寸)

\*180mm X 68mm X 26mm (长 L \* 宽 W \* 高 H ).

## 8. Weight (重量)

\*约 350g

## 9. MTBF (平均故障间隔时间)

The MTBF shall be at least 100,000 hours at  $25^{\circ}\text{C}$ , half load and normal input condition.


在环境温度  $25^{\circ}\text{C}$  下, 带半载以及正常输入时, 平均无故障时间至少为 100,000 小时。



## 12. Requirements for Burning in Test (老化测试要求)



We recommend that the Power Supply should be mounted tightly with the heatsink described as the following heatsink drawing while the products burn in at 30℃ and 220Vac input.

在环境温度 30℃下, 不加湿, 电源输入 220V, 带满负载, 机壳底面紧贴散热板 (建议散热板尺寸见图 1 所示, 单位 mm), 加电老化。(本规格书中指标, 是在建议环境下测试的结果)。

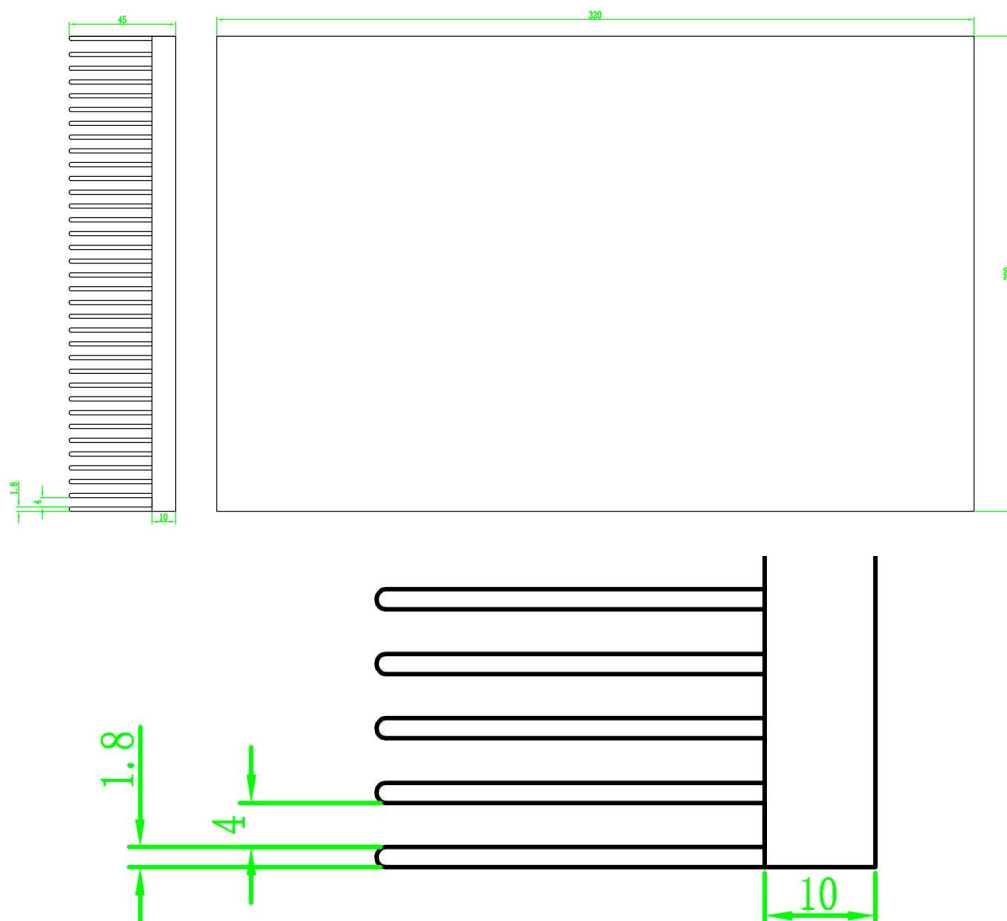

图一: Scheme for Heatsink 散热板尺寸图 (单位: mm)

## 13. LABEL (标签)

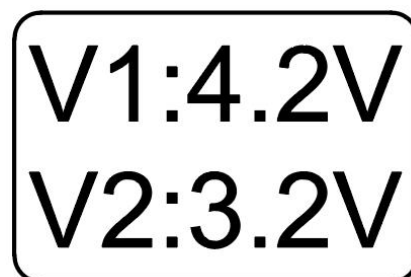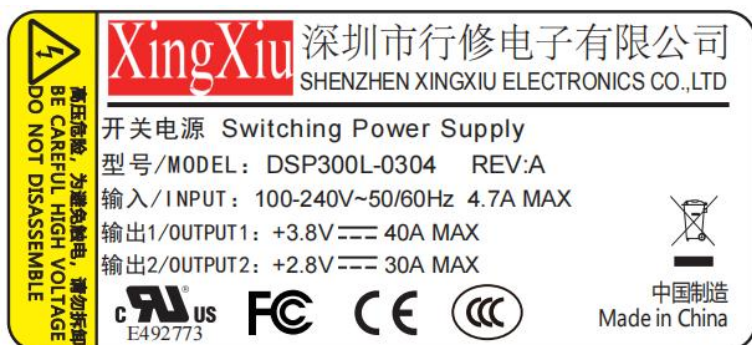

备注: 贴 V1:4.2V-V2:3.2V 小标签